


● Parameter

SMQT

产品名称	
产品型号	EB-132
尺寸	34 × 41 × 6.5 (mm)
触点类型	NO / NC (常开/常闭)
触点间距	20 ± 5 (mm)
额定电压	≤100V AC
额定电流	≤500mA
额定功率	≤10W
材料	ABS (丙烯腈-丁二烯-苯乙烯)
工作温度	-10 °C ~ 50 °C
包装数量	14G

● Dimension Picture

SMQT

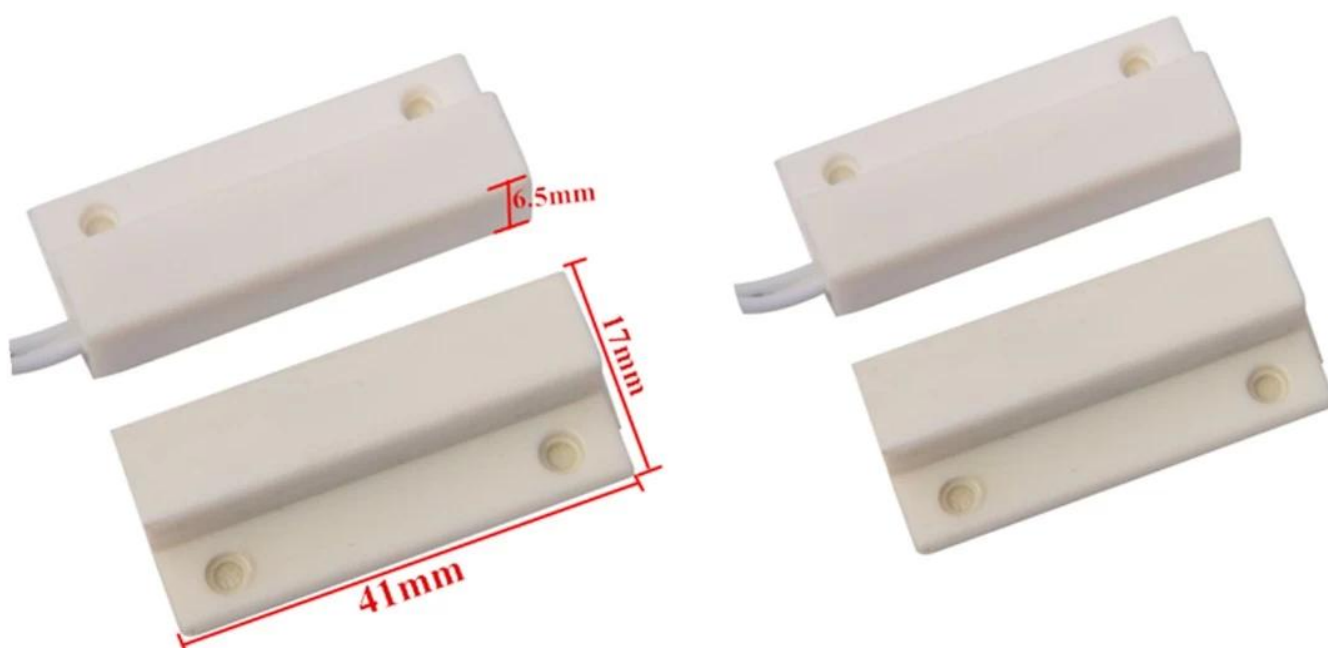

● Introduction

SMQT



● Packing list

๓๓๓๓๓๓๓๓ ๓๓๓๓๓๓๓ ๓๓๓๓๓๓	
๓๓๓๓๓๓ ๓๓๓	๓๓๓๓๓๓๓๓๓๓๓ ๓๓๓๓๓ ๓๓๓๓๓๓๓๓ ๓๓๓๓๓๓๓๓ EB-132
๓๓๓๓๓๓๓	20 1200 / ๓๓๓ ๓๓ ๓๓๓๓ ๓๓๓๓๓๓๓๓ ๓๓๓๓ PCS percarton
๓๓๓๓๓๓๓ ๓๓๓๓๓๓ ๓๓๓๓	38 * 30 * 30 (๓๓)
๓๓๓	17KG





● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....