

Wireless door sensor

- Fireproof ABS shell
- DC 12V power supply
- Wireless frequency 315Mhz/433Mhz optional
- Wireless signal transmisson distance max 100m



• Parameter





无线门磁	
产品型号	EB-130
供电电压	12V
工作电压	40 ± 5 (V)
无线频率	315MHZ / 433MHZ
传输距离	≤100m

• Introduction




12V 直流电源供电，采用 ABS 防火外壳，采用 315MHz/433MHz 无线频率，传输距离最大 100m。

PRODUCT PICTURE

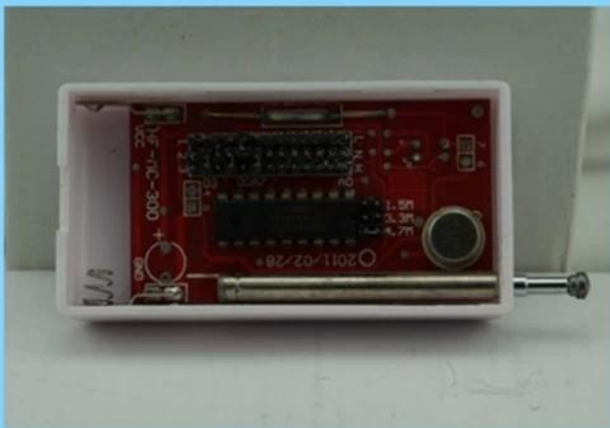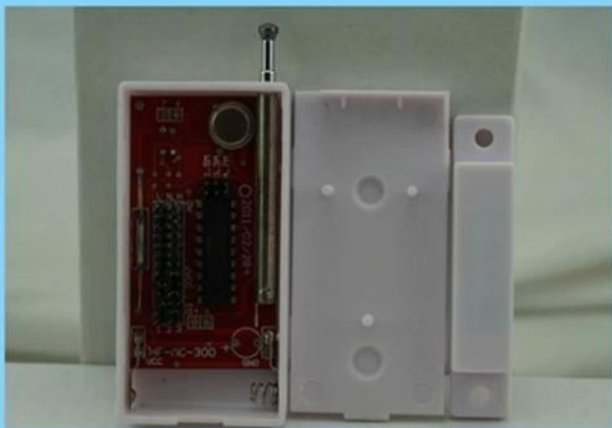

PRODUCT FEATURE

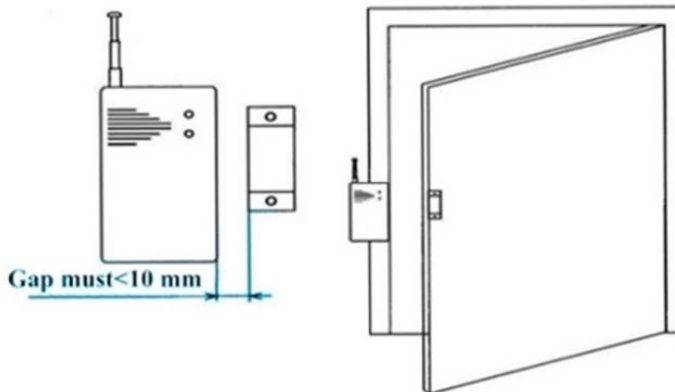

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....