

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA


Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

SMQT®

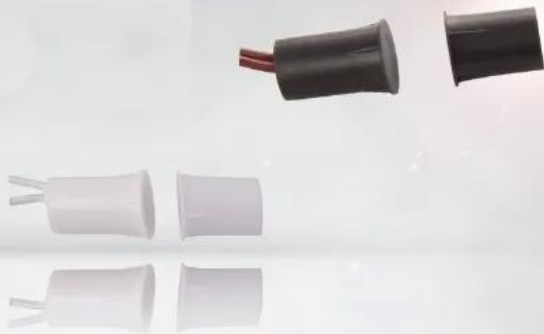

□□□□□□ □□□

□□□□□□	
□□□□□□ □□□	أبيض / بني حريق باب المغناطيسي الاستشعار عن باب خشبي أو نافذة
□□□□□□	EB-135
□□□□□□	24 × 41 × 6 (□□)
□□□□□□□□ □□□□□□□□ □□□	NO / NC (□□□□□□□□)
□□□□□□	20 ± 5 (□□)
□□□□□□ □□□□	≤100V □□
□□□□□□ □□□□□□ □□□□	≤500mA
□□□□□□ □□□□	≤10W
□□□□□□	□□□□□□□□) □□□□ / □□□□□□
□ □□□□□	□□□□□ □□□ □□□□□□ □□□□
□□□□□□	□□□□□□□□ □□□ □□□□□
□□□□□□ □□□□□□ □□□□□	-10 °C ~ 50 °C
□□□□□□□□ □□□□□□	8G



2 Color optional



White

Brown

Fireproof ABS housing

Brown or White color optional

Suit for wooden doors or windows

Normal open or Normal close optional

2 years quality warranty,welcome OEM

ABS 135-ABS 135-ABS 135-ABS 135-ABS





Door

Magnetic Contact

safe door happy life

(Notice:need match the home alarm system to



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.



Notice:
Gap<2cm

2 Color optional



White **Brown**

□□□□□□□□ □□□□□□□□



□□□□□□ □□□□□



□□□□□□ □□□□□□

□□□□□□ □□



CUSTOMER



展会

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



□□□□



□□□□ □□□□ & □□□□□□

□□□ □□□□ & □□□□□ □□□□□□ & □□□□□□



