

● Parameter SMQT

2/4/6/8/10		
5m / 10m / 20m / 30m / 40m / 60m		
37/72/125/167 / 209		
30mA□80mA		
DC12V□DC18V		
<1.5ass		
3A□AC120V / DC24V		
180º±90º		
-35°C∏55°C		

Introduction
SMQT

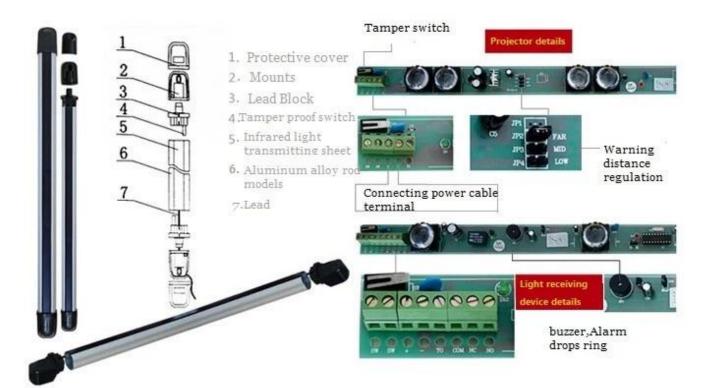

Dimesion Picture SMOT

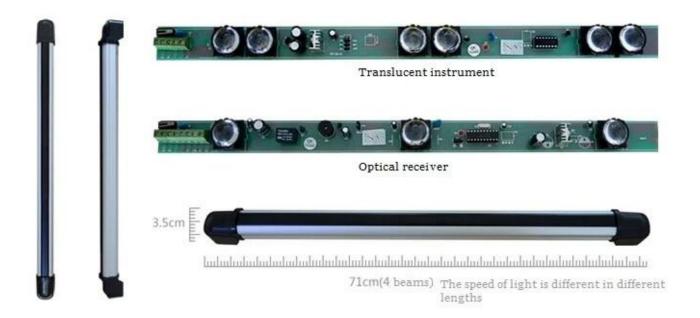

Installations
SMQT













● Features SMQT

With tamper resistant, anti interference, high reliability

With anti demolition, anti interference function, when there is an intruder to remove or damage, the immediate alarm model, the



Tamper switch, when the invaders destroyed or disassembled, tamper switch will trigger the alarm immediately bounce.



Waterproof moisture-proof function, can adapt to bad weather

Because this product is used in indoor and outdoor, the use of universal is relatively strong. The products according to the scientific design, with rain proof structure for installation of indoor and outdoor machine of supermarket zone, waterproof, dust-proof, wind and rain, wind and rain does not matter, can adapt to all kinds of bad environment and weather.

Aluminum alloy material design: beautiful and reliable structure

Main body outer shell is made of high quality aluminum alloy material, and the surface of the polishing treatment, bones and durable; the import filter to visible light good filtering function.




Installation and debugging is convenient, 3 when the warning distance can be adjusted

After the installation of the fixed infrared beam of the launch and reception of vision can be achieved 360 degre of rotation, three block adjustable warning distance,



The bracket adopts the latest sliding cover to be designed, and the installation is more convenient. Disassembly more secure.

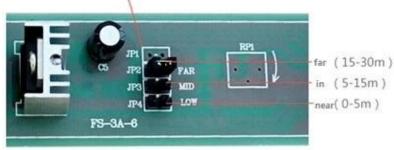

00.

3 warning distance adjustable map

Packing list SMOT



• Office SMQT













• Exhibitions SMQT

