

# Wired metal magnetic contact sensor

NO/NC code mode optional

50±10(mm) gap distance

Max voltage ≤100VDC, Max current ≤500mA


Alloy-zn material

Suitable for metal door or window

Grey color


Weight : A:150g B:100g C:50g

**SMQT**

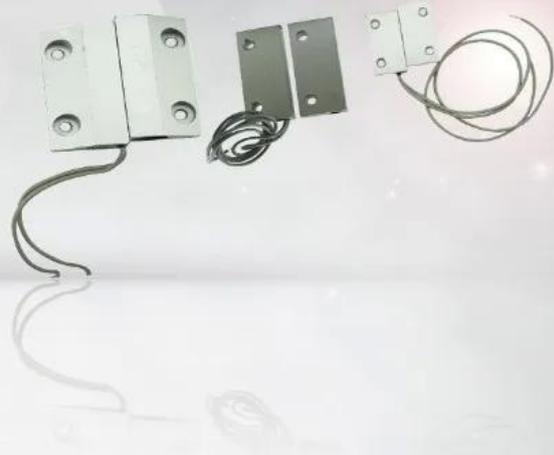

	□□
□□	EB-138
□□	□A□46×21×12□mm□ □B□47×17×7□mm□ □C□30×13×6□mm□
□□□□	NOT / NC□□□□
GUP	50±10□mm□
□□□□	≤100VDC
□□□□	≤500mA
□□□□	≤10W
□□	□□
□□	□□□□
□□	□□□□
□□	150g / 100g / 50g

□□□EB-138A / B / C□□□□□□□□

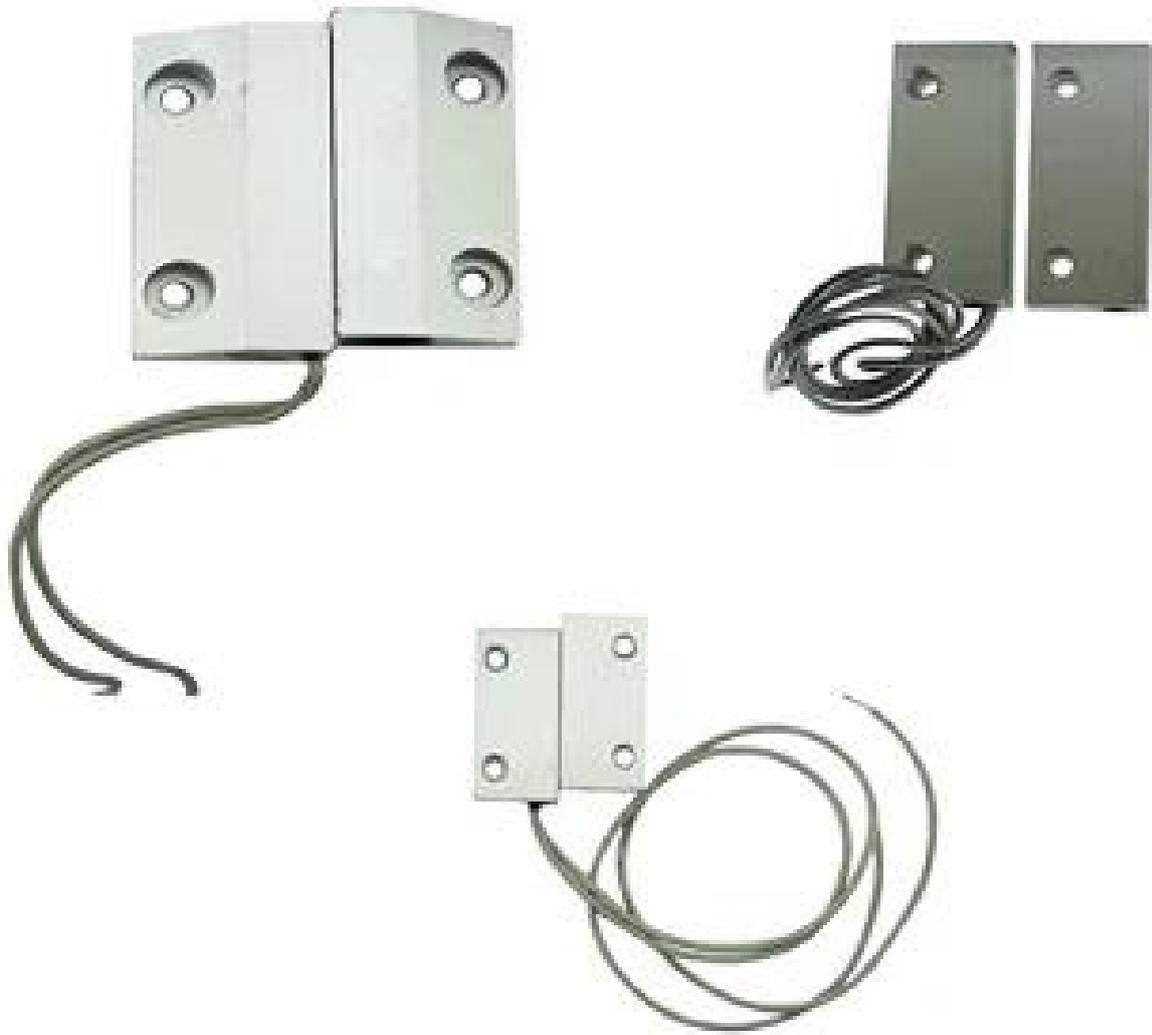

1.Wired metal magnetic contact sensor

2.NO/NC code mode is optional

3.Suit for metal door or window

4.Weight: A: 150g, B: 100g, C: 50g

5.Welcome OEM, 2 years quality warranty

# IN-KIND



□□□□



SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

SMQT™



CE RoHs FC

□□□□



〇〇



LOVE

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



00000**D**00 000 000000000000 0000 00

0000000000

**2.00000T / T00000000000**

0000**3.24**00 0 00000**d** 00000000000000

00000000000000000000000000000000

**5.00000000 00 0UPS0DHL0TNT0Fedex0000000000**



**T0 000000000000**

**A**0000000000000000000000000000000000 00000000

000000000000

000000**1-3**0000000000000000**10-15**000000

00000000000000

00000000000000

00000000000000

**A**0000000000000000000000000000000000 0000 00000

000000000000000000000000

0000000000000000000000000000000000 000000 0 0000000000000000 00000000 0000**ñ**0

000000 00000000 0000**ñ**0