



• Parameter

SMQT

	RS232 []RS485[][]
	EA-01
	90×33×12[mm[
	□□□□ □EIA / TIA RS-232C□RS-485□□
0000	S-232CDB9RS-485DBP
	300-115200BPS
	5 m[RS-232[][]1200 m [RS-485][]
	RS-232[TXD[]RXD[]RTS[]CTS[]DTR[] DSR[]DCD[]GND RS-485[][][]+[][] - []GND
	00000 0000000000TD@RD@GND@ 0000
	500950
	-10°C∏85°C
	0.106kg

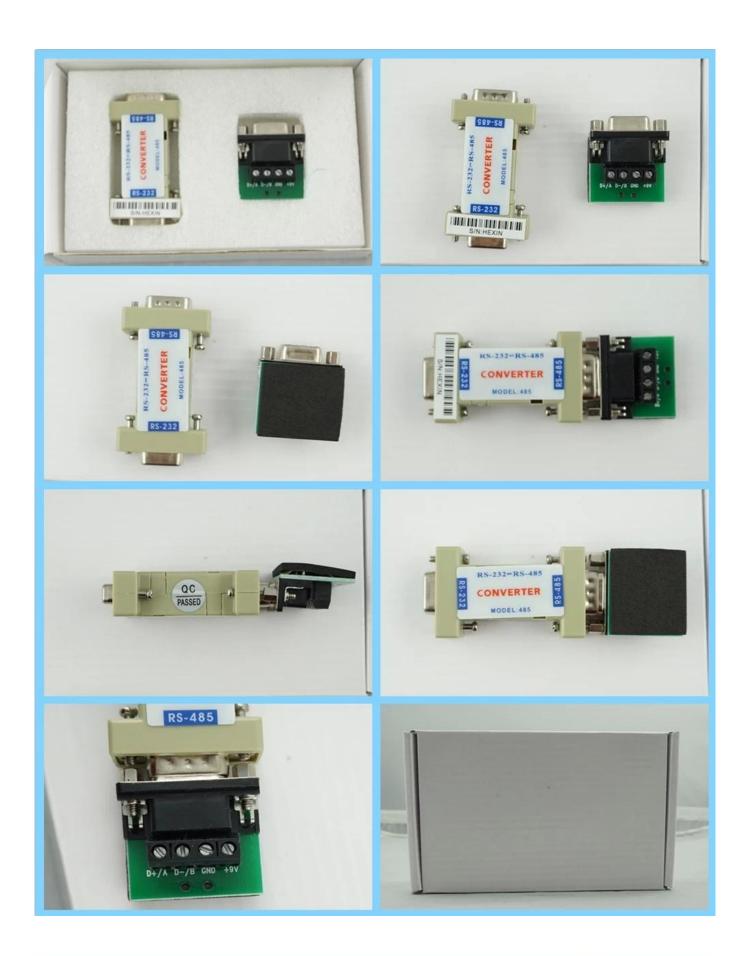

• Feature SMQT

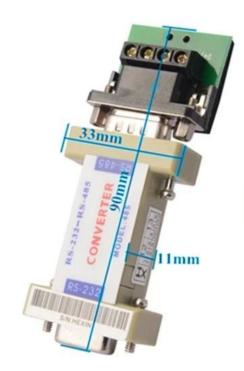

EA-01



Converter RS232 to RS485

Dimension:90×33×12(mm)

Interface compatible with EIA /

TIA RS-232C, RS-485 standard

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

RS-232: TXD, RXD, RTS, CTS, DTR, DSR,

DCD, GND

RS-485: Date +, Date-, GND,9V+

Relative Humidity:5%~95%

Environment temprature:-10 °C~85 °C

Welcome OEM, 2 years quality warranty

Application

SMQT



Packaging & shipping

SMQT

	□□□RS232□RS485 EA-01
	100pcs /[]
	53 * 40 * 37[]cm[]
	10kg



• Office show smot













• Exhibition smot

