Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed

Twisted-pair cables as transmission medium

With protection of ±15KVESD,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT®

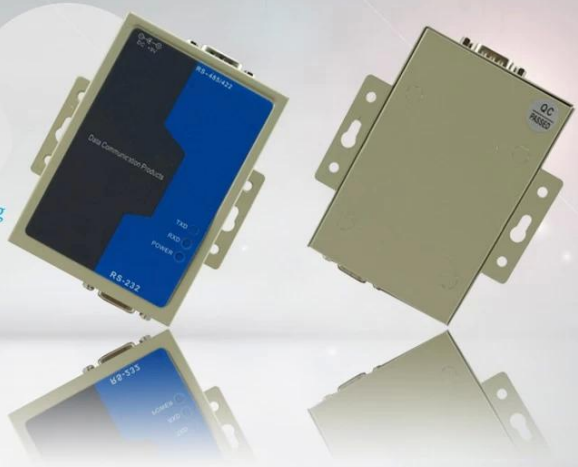

• Parameter

SMQT®

□□	
□□□□	□□□□□RS232□RS485 EA-05
□□	EA-05
□□	90L * 65W * 25.5H□mm□
□□□□	DC 9V
□□□□	□□□□ □EIA / TIA RS-232C□RS-485 / RS-422□□
□□□□	RS-232C□□DB9 □□□□□□□RS-422 / RS-485□□DB9□□□□□ □□□□□□
□□□□	□□□□□TXD RXD□□
□□□□	□□□□□ □
□□□□	300-115.2KBPS
□□□□	RS-232□□± 15KVESD□□□RS-422 / RS-485□□□600W□□□□ □□□□
□□	3500VRMS
□□	□□
□□	□□□□
□□□□	5□□95□
□□□□	0℃□50℃
□□	0.62kg

• In-kind shooting

SMQT®

•Feature

SMQT

EA-05

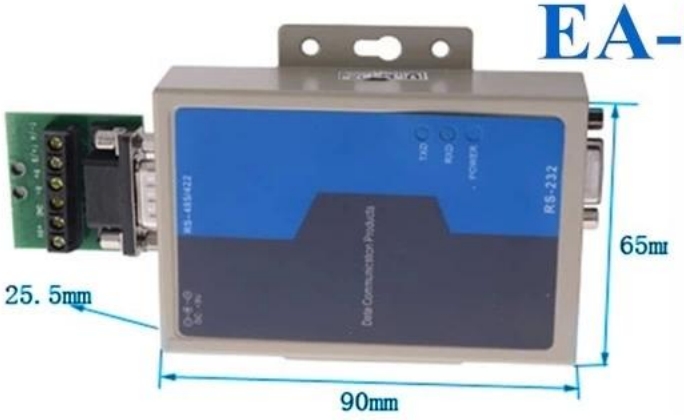

Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port, RS-422/485 Interface DB9 female connector

Transmission medium:shielded twisted pairwire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity:5%~95%

Environment temprature:0 ℃ ~ 50 ℃

Net weight:0.62kg

Welcome OEM and 2 years quality warranty

•Application

SMQT

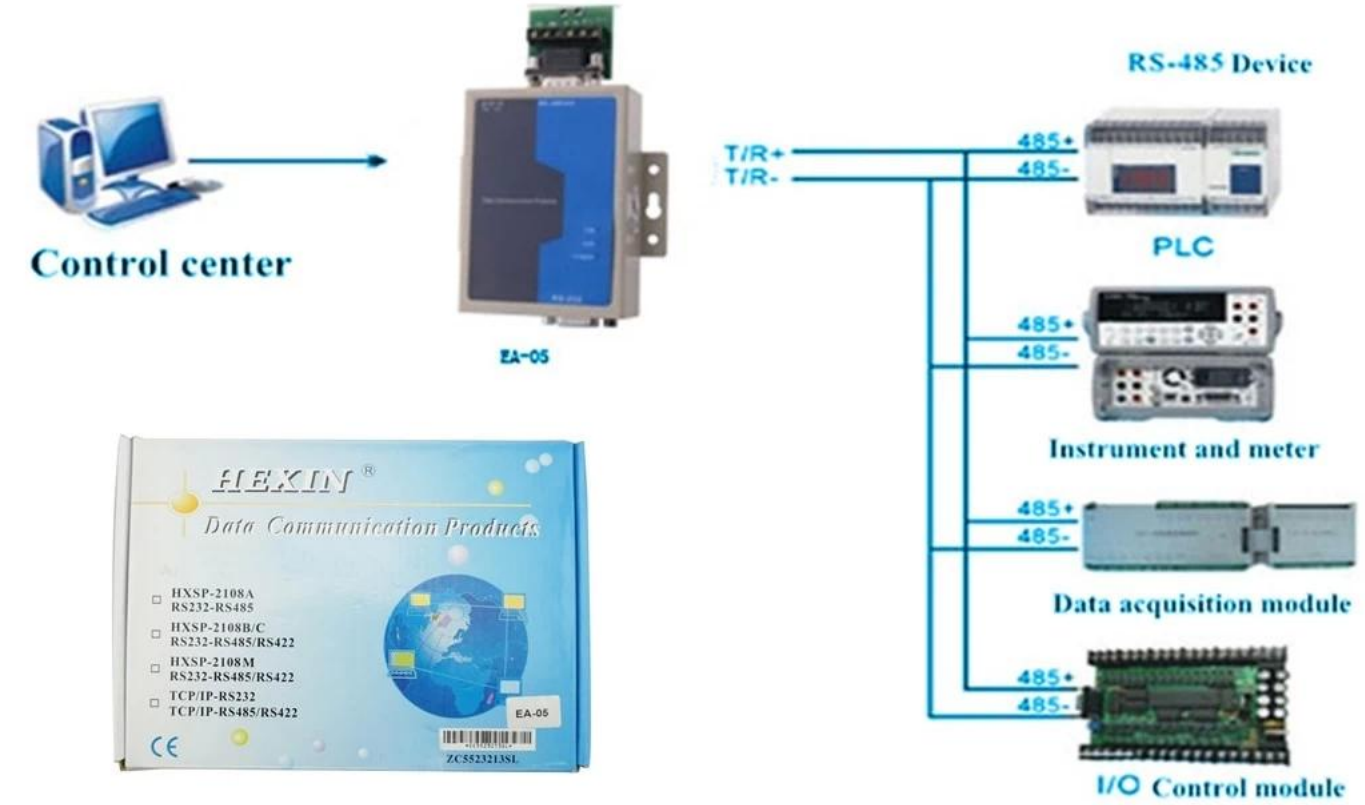

•Packaging & shipping

SMQT

□□□□	
□□□□	□□□□□RS232□RS485 EA-05
□□	□□20□
□□□□	43 * 30 * 37□cm□
□□	14kg

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair