

Converter RS232/485 to TCP/IP

Interface :Ethernet(10BASE-T),RS232/485 with 6 wiring terminals

Format:TCP/UDP/IP/ICMP,Ethernet,ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment,changing the traditional serial port communication to network communication, to achieve fast serial device networking .




Parameter



Model	EA-06
Dimensions	92L * 63W * 23H mm
Working Voltage	DC4.5V~5.5V
Protocol	TCP / UDP / IP / ICMP / ARP
Interface	10Base-T / RS232 / 485
Serial Port	TXD RXD
Transmission Speed	300bps~115200bps
Power	3500VRMS
Weight	0.624kg
Temperature	0°C~50°C
Humidity	5%~95%

In-kind shooting



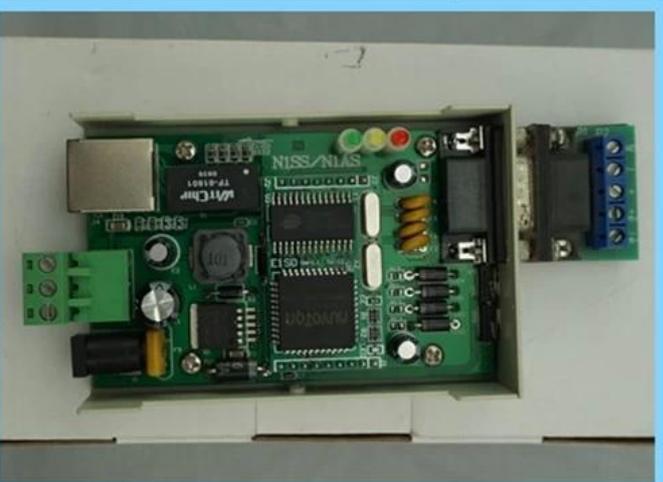

● *Feature*

SMQT®



Converter RS232/485 to TCP/IP

Dimension:96×63×23(mm)

Transmission speed:300bps-115200bps


Format:TCP/UDP/IP/ICMP/Etjernet/ARP

Interface:Ethernet(10Base-T),RS232/485

with 6 wiring terminals

Welcome OEM and 2 years quality warranty

Application

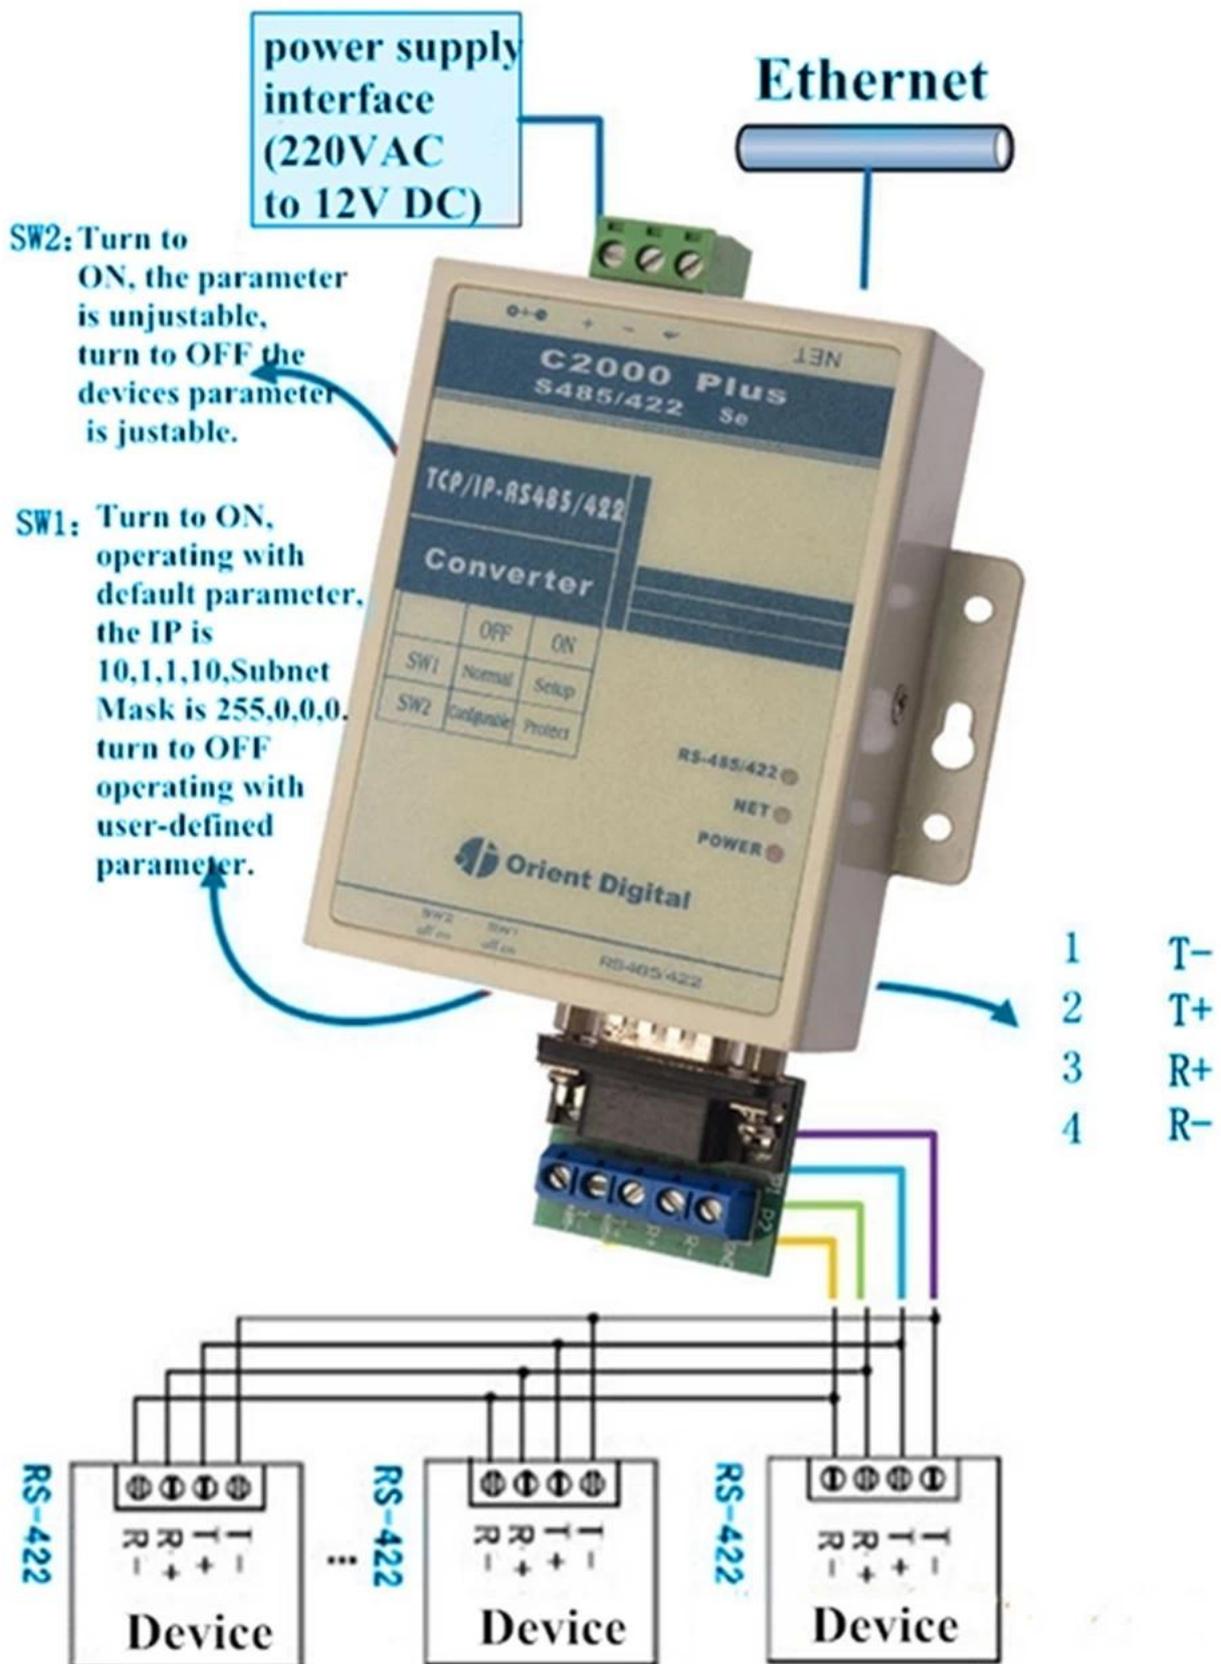

Packaging & shipping

□□□□	
□□□□	□□□□□□□□RS232 / 485□TCP / IP EA-06
□□	□□20□
□□□□	43 * 30 * 37□cm□
□□	15kg



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair