## Parameter

SMQT

| □□ | |
|---|---|
| □□□□ | □□□□□□□□ |
| □□A | 86 * 50 * 25□□□□ |
| □□□B | 86 * 86 * 25□□□□ |
| □□□□ | DC12V |
| □□□□ | □□□□□□□ |
| □□□□□ | 50□□□□□□□ |
| □□□□ | □□□□□□□□ |
| □□ | -20℃□+ 50℃ |
| □□□□ | 0□95□□□□□□□ |
| □□□□ | □□ |

## Introduction

SMQT

1.Button□□□□□□□

## Installations

SMQT

## Features

SMQT

## 1 Superior Design

Touch push button design simple and beautiful,Panel using organic glass materials， touch induction to open the door,button USES the interactive design of light touch response. Internal using PC rubber production, high temperature resistant do not fade

Resistance to heat shock  Organic glass touch responsive

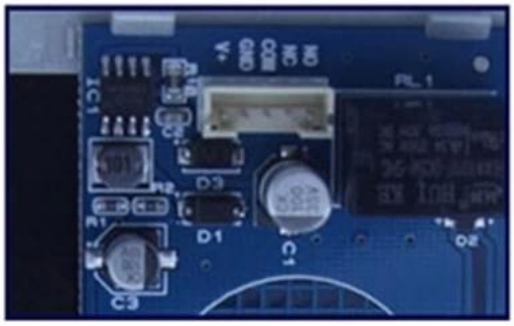

## 2 Product components

500,000 times test qualified,the relay switch power output, (NO NC COM)3 lines button suitabel all Access control system

NO NC COM,3 lines

## 3 Strong stability

Waterproof and dustproof more durable and strong,resistance to high temperature shock do not fade.

Waterproof and Dustproof  Stable solid long life

## Packing list

SMQT

| □□□□ | | |
|---|---|---|
| □□□□ | EA-20A | EA-20B |
| □□ | 100 /□ | 100 /□ |
| □□□□ | 46.5L * 37.5W * 28H□□□□ | 46.5L * 37.5W * 28H□□□□ |
| □□□□ | 5.8□□ | 8.5□□ |

EXIT

TNT
DHL
ups
FedEx
Express
EMS

## Exhibitions

SMQT