
● Parameter SMOT

0000	EA-92DK[][][][][][]
	DC12V±DC3V
0000	< 1W
	125KHZ ID
0000	60[[
	150[]
0000	WG26 / 34
0000	1[]/ MS
	4[/ 8[
0000	96L * 96W * 22H[MM[]
0000	0000
	-30°C∏+ 65°C

Introduction
SMQT



Dimesion Picture SMOT

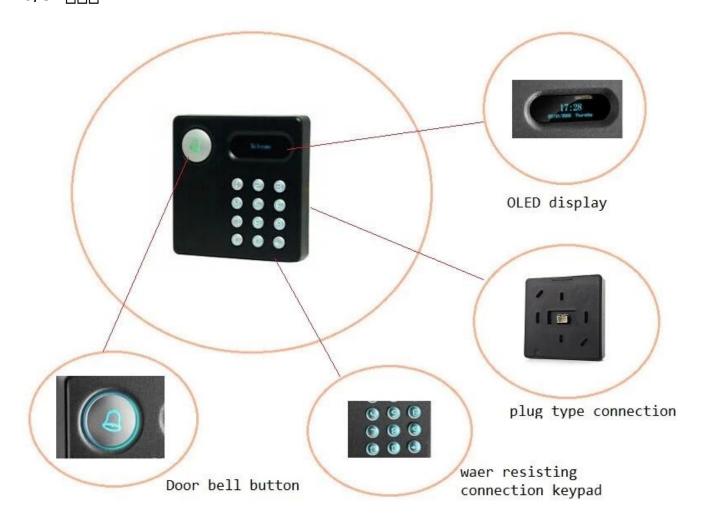

Installations
SMQT

AAAAAA **AAAA** AAAAAAAA



• Features SMQT

-]_____;_OLED

- __WG26 / 34_____



Features

- imported PC material, heat resistance, corrosion resistance is strong.
- 2. High safety performance, with tamper function.



- 3. Has a reverse current protection, lightning protection, anti-crash design, self-detection.
- 4. Pluggable wiring, easy to install.
- Built-in card reader, but with WG signal output, external card reader (WG26 / 34), bi-directional swipe.

Packing list





outside packaged



inside packaged

• Office SMQT













• Exhibitions SMQT

