

● Parameter

SMQT

	□□
□□	86 L * 86W * 50 H (mm)
□□□□	30VDC
□□□□	2A
□□	250V
□□□□	-10 °C ~ 50 °C
□□	□□ / □□
□□□□	□□


● Introduction

SMQT

□□□□□□□□□□□□
 □□□□ □ □□ / □□
 □□ □ □ / □ / □ / □□□
 □□□□ □ □□□□□□□□□□
 □□□□□□ □ □□□□ □□□□ □□□□
 □□□□ □ □□□□
 □□□□ □ □□□□□□□□□□


● Dimesion Picture

SMQT

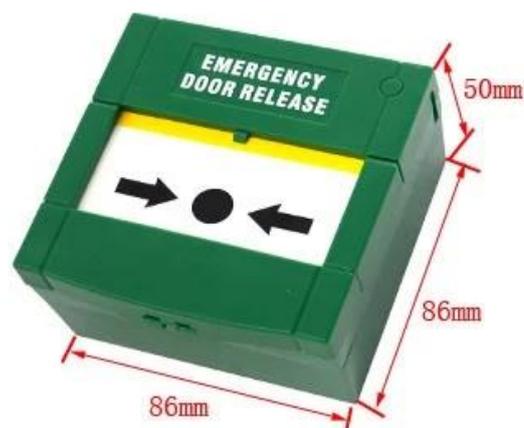

● Installations

SMQT

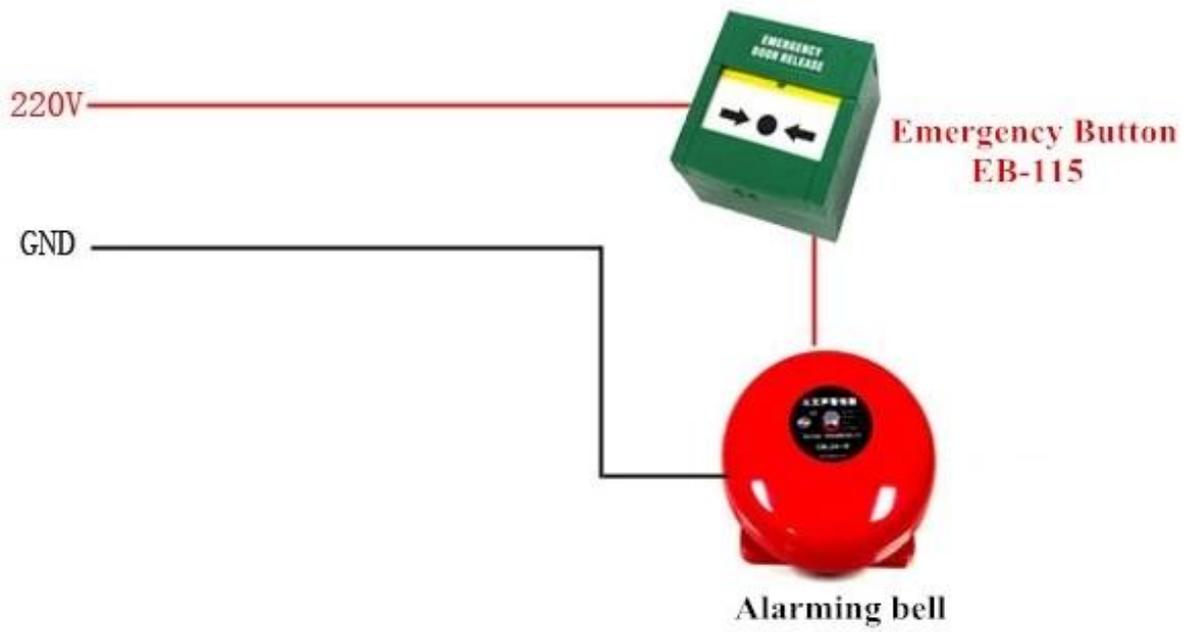

● Features

SMOT®

- 1. 100% fireproof
- 2. 100% waterproof
- 3. 100% reliable

● Packing list

SMOT®



Quantity	100 / Box
Dimensions	47 L * 39W * 30 H mm
Weight	16.12 kg



● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair