
● Parameter SMOT

	Φ 10 * 18.5 [][]
	20 ± 5 [][]
	≤100VDC
	≤500mA
	≤10W
	ABS 🖂 🖂 🖂
0000	
	8 g

Dimesion Picture SMQT

## 2 Color optional

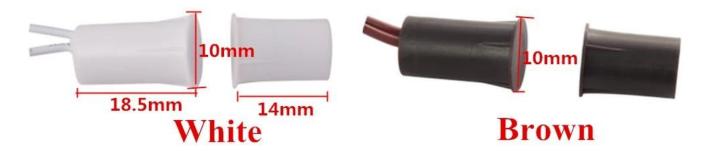

● Installations SMQT



## Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.



## Notice: Gap<2cm

## **Sliding window**

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

● Features SMQT

- $2.\Pi\Pi\Pi\Pi\Pi\Pi$



Packing list
SMOT

	2000 / 🛘	
0000	37.5 L * 29.5W * 20 H [][]	
0000	20.94 🔲	



In the Office
SMQT













• Exhibitions SMQT

