

● Parameter


SMQT

	□□
□□□□	□□□□□□□□□□
□□	Φ 10 * 18.5 □□□□
□□	□□ / □□
□□□□□	20 ± 5 □□□□
□□□□	≤100VDC
□□□□	≤500mA
□□□□	≤10W
□□□□□	ABS □□□□
□□□□	□□ / □
□□	□□□□□□
□□□□	8 g

● Dimesion Picture

SMQT

2 Color optional

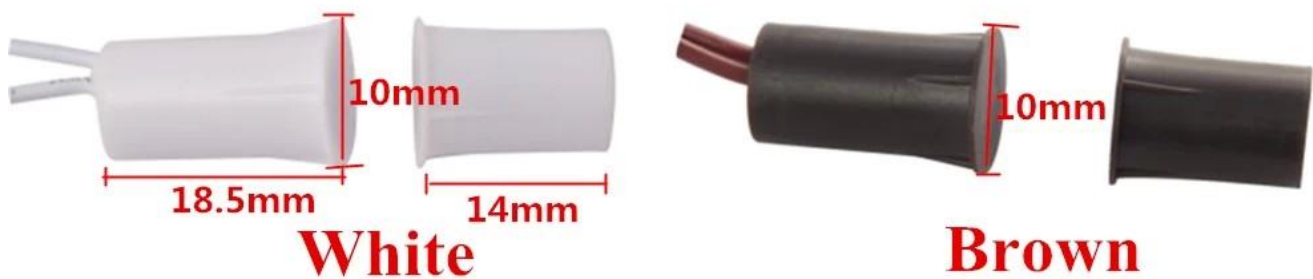


● Installations

SMQT



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

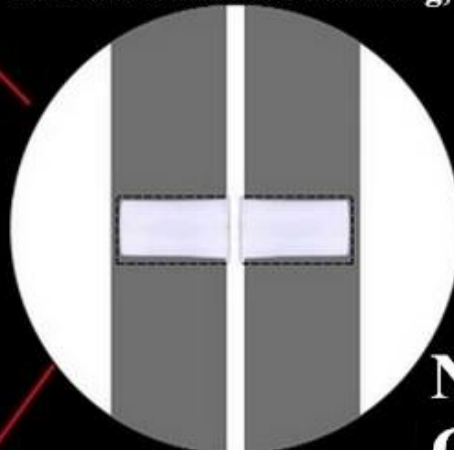

Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

● Features

SMQT®

1. □□□□□□□□□□□□□□□□□□□□□□□□□□□□
2. □□□□□
3. □□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□



Suitable for:
 Suitable for home anti-theft



Door
Magnetic Contact
 safe door happy life

(Notice:need match the home alarm system to

● Packing list



	□□□□
□□	2000 / □
□□□□	37.5 L * 29.5W * 20 H □□□□
□□□□	20.94 □□





● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair