

● Parameter

SMQT

□□	
□□□□	□□□□□
□□	EB-137A / B
□□□□	106L * 38W * 10H□MM□
□□	□□/□□
□□□□	60±10□□□□
□□	≤100VDC
□□□□	≤500mA
□□□□	≤10W
□□□□	□□□B□□□
□□	□□□
□□□□	254□/154□

● Installations

SMQT



137A(Alloy-zn)



137B(Alloy-Al)

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□
□□□□□□□□□□

● Dimesion Picture

SMQT




● Installations

SMQT®



● Features

SMQT®

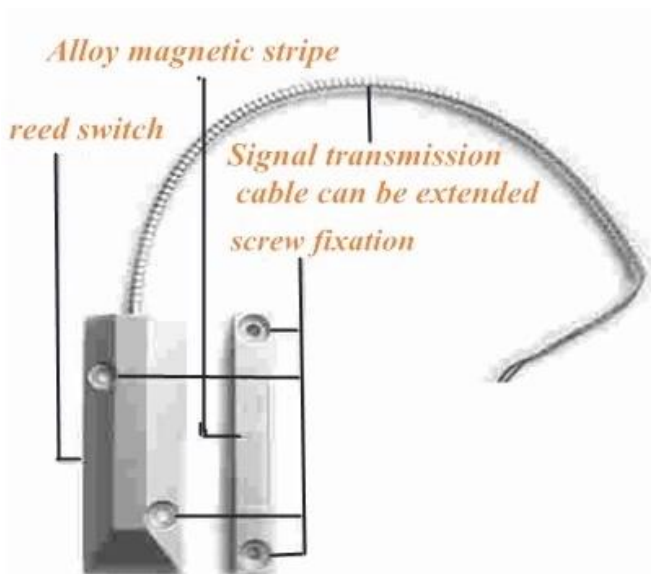

● Packing list

SMOT

□□□□		
□□□□	□□□□□	
□□	EA-137A	EA-137B
□□	50PCS / CTN	
□□□□	37.5L * 30W * 29.5H□□□□	
□□□□	14.14□□	15.5□□



● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....