Parameter
SMQT


106 * 16 * 16
00/00
50±10□□□
≤100VDC
≤500mA
≤10W
□□□B ABS
158□/62□

Introduction
SMQT'





● Installations SMQT

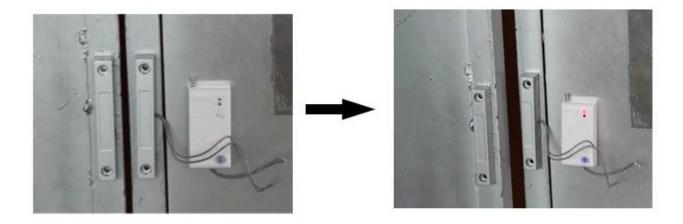

• Features SMQT

Powerful Fireproof Materials

Magnetic contact is made of safe industrial ABS fireproof materials. 22# 400mm cable seasy to connect other accessories.







High Sensitivity

High quality magnetic works perfect reed switch. So that magnetic contact work sensitively and effectively.

Total Waterproof Design

Magnetic contact is sealed by PC, so that it is waterproof and has a long work life. Without surface leakage. More safe.





Packing list SMOT

EB-139A	EB-139B
200□/ CTN	200□/ CTN
37.5L * 29.5W * 20H□□□□	37.5L * 29.5W * 20H□□□□
36.62□□	29.13

• Office SMQT













• Exhibitions SMQT

