

## • *Parameter*

SMQT®

□□□□	□□□□□□□□
□□□□	EB-166
□□□□	ABS□□□□
□□□□	DC12V
□□□□□□	30W
□□□□	80HZ□15KHZ
SNR	≥82db
□□□□	120□□
□□□□	-10°C□65°C
□□	40□□95□□


## • *Introduction*

SMQT®



• *Dimension*

SMQT

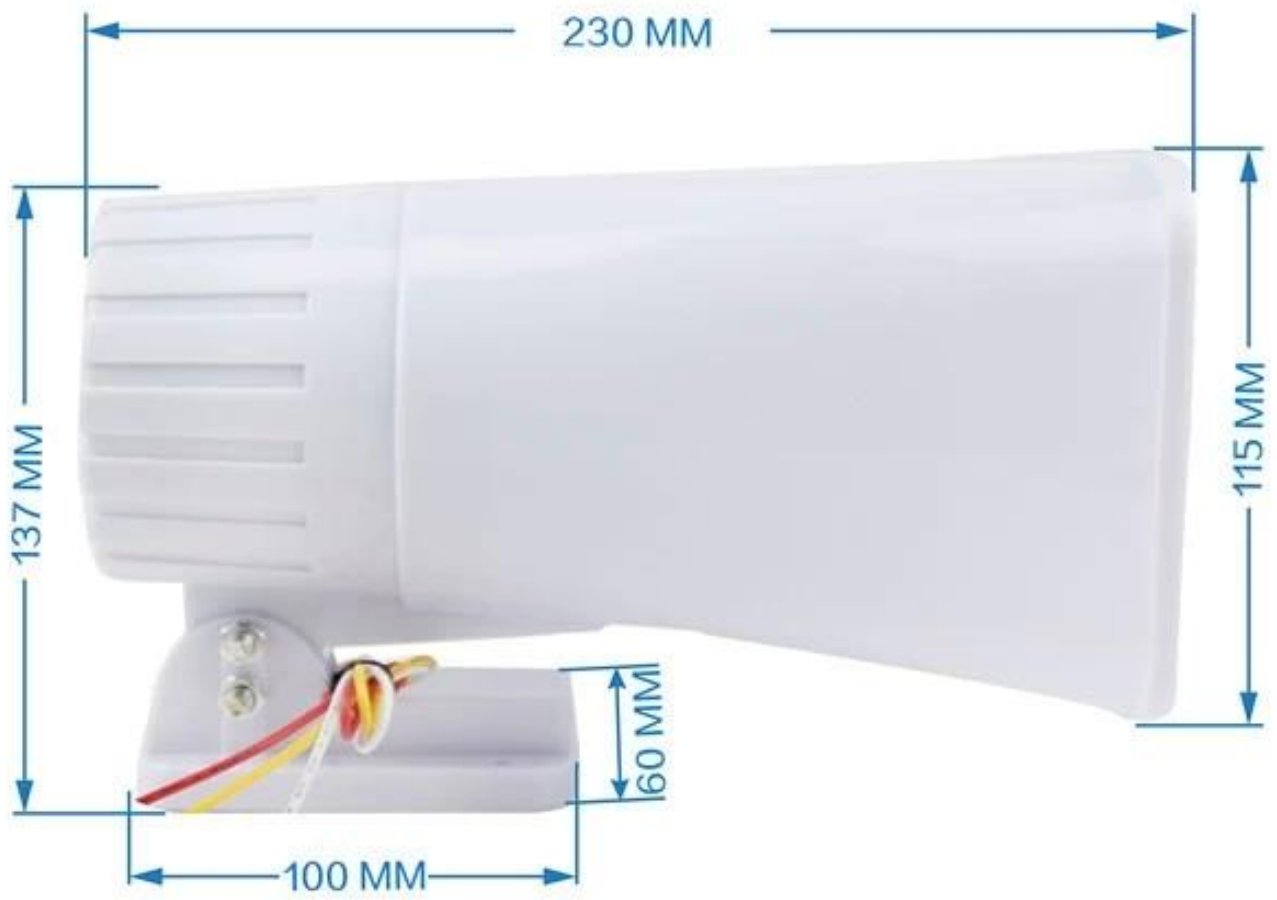

• *Feature*

SMQT



1

## *ABS shell*

ABS engineering plastics

Adopt ABS material production, good pressure resistance, corrosion resistance, can be used in harsh environment such as toxic, long life not aging.

2

## *Sounds loud*

Alarm sounds great

NV0EOS phonetic chip is applied to make speech processing core, with the stability of the industrial performance. Alarm sounds great, is not afraid of other people can't hear you.



3

## *Flexible stent*

Rotating stents

Can be fixed on the ground, also can be fixed on the wall, can rotate 90 degrees to use, convenient installation.



4

## *Well-adapted*

Wide applicability

Suitable for oil field, high pressure, the mine, toxic sites, car, airport QuDiao, etc.



1. NV020S
2. ABS
- 3.
- 4.
- 5.

## • Packaging & shipping

SMQT



## • Office show

SMQT



## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....