

● Parameter

SMQT

□□	
□□□□	□□□□□□□□□□
□□	EB-188
□□	110×70×40□□□□
□□□□	3V DC□2AA□□□□
□□□□□	< = 25uA
□□□□	< = 15□□
□□□□	9□
□□□□	15°
□□□□	315MHZ / 433MHZ□2262□□ □□□□□□□□
□□□□	200□□□□□□□□
□□□□	2.2□
□□□□	□□□□
□□	□□
□□	□□□□□□
□□	□□ABS□□
□□	0.184□□

● Parameter


SMQT



● Introduction

SMQT

PRODUCT PROFILE

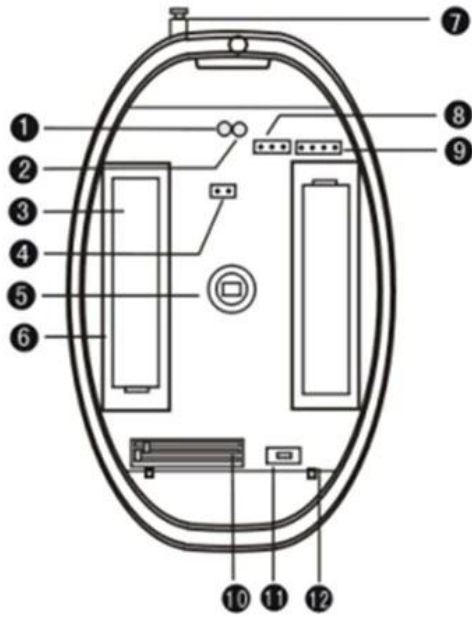

- ① LED indicator
- ② Low power indicator
- ③ Battery
- ④ LED jumper
- ⑤ IR sensor
- ⑥ Battery box
- ⑦ Antenna
- ⑧ DELAY Jumper
- ⑨ RANGE Jumper
- ⑩ Code Jumper
- ⑪ Test Button
- ⑫ PCB



● Features

SMOT



- 1. Adjustable
- 2. Auto
- 3.
- 4. Adjustable
- 5. Anti-RFI; I-EMI
- 6. Send
- 7. Low
- 8. SMT DESIGN



Curtain PIR sensor

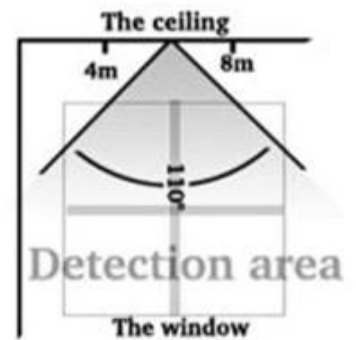

DETECTING AREA VIEW

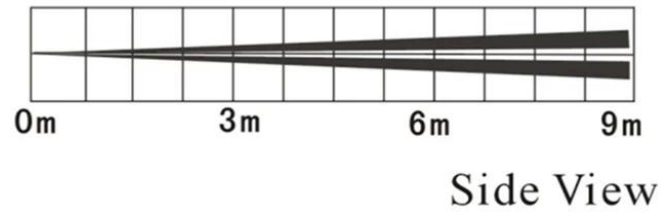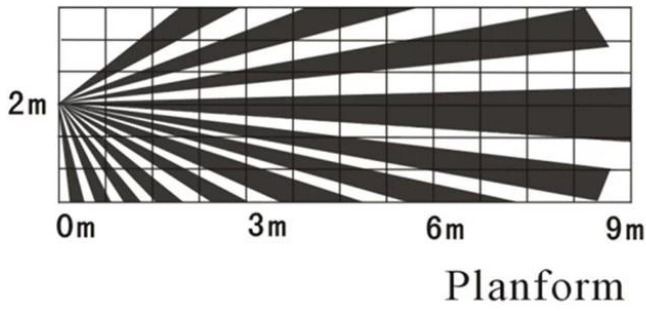

● Packing list

SMQT

	□□□□
□□□□	□□□□□□□□□□
□□	100□/□
□□□□	55×42×29□cm□
□□	20□□



● Office

SMQT



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....