

Wired embedded magnetic contact

NC/NO mode optional


35±5(mm) gap distance

Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

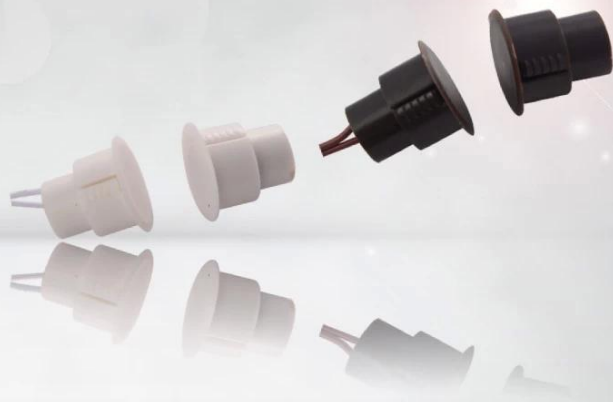


• Parameter



□□	
□□□□	□□□□□□
□□	EB-136
□□	Φ19×25□mm□
□□□□	NO / NC□□□□
□□	35±5□mm□
□□□□	≤100VDC
□□□□	≤500mA
□□□□□	≤10W
□□	□□/□□□□□□
□□	□□□□□□
□□	□□ABS□□
□□□□	-10°C□50°C
□□	24g

• In-kind shooting



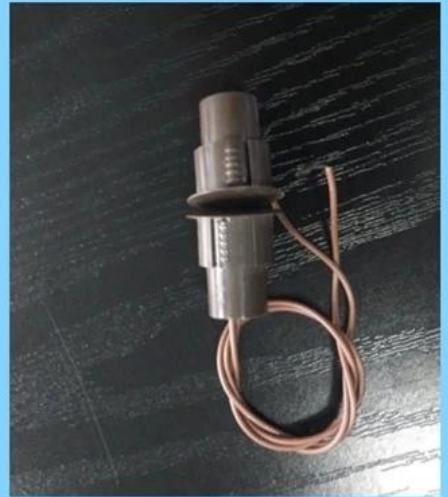

• *Feature*

SMQT®



EB-136

Dimension: $\phi 19 * 25(\text{mm})$
Material: ABS
Max Gap: $\leq 40\text{mm}$
Install way: Drill hole install
Wire : 22# wire 40cm
Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.

• Packaging & shipping

SMQT®

□□□□	
□□□□	□□□□□□ EB-136
□□	□□600□
□□□□	38 * 30 * 30□cm□
□□	16kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....