


□□ **120db** □□□□□□□□□□□□□□□□□□□□ **8** □□□□□



Wired Strobe Siren
Security


EB-162"s

EB-162	
Model	EB-162
Dimensions	126*120*107mm
Voltage	12~30V
Current	<40mA
Sound Level	105db
Frequency	800Hz
Power	<1.3W
Temperature Range	-20°C~50°C
Material	ABS
Light Source	LED
Efficiency	95%
Storage Temperature	-20°C~60°C
Weight	0.4kg


EB-162

EB-162 LED


Size

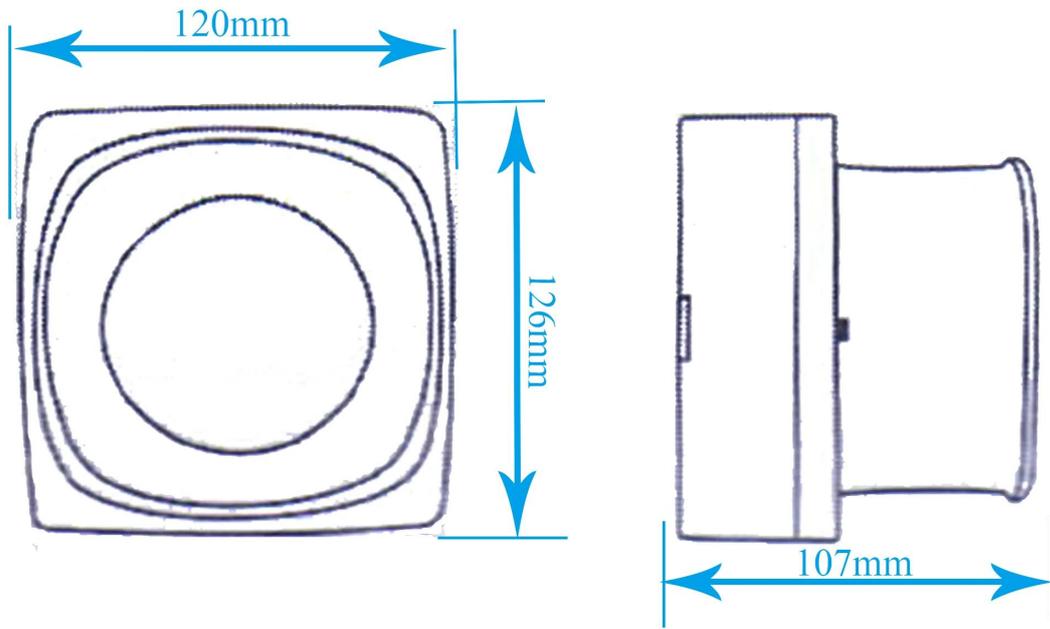

Appearance

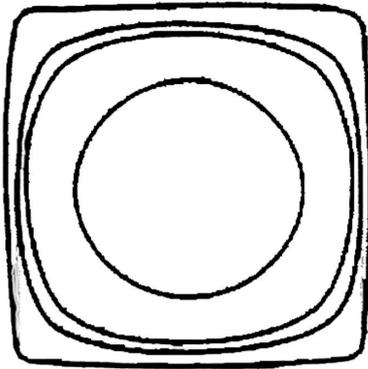


Front

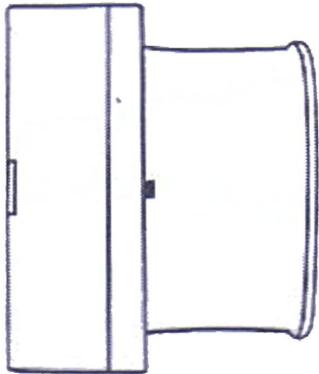




Side



Waterproof

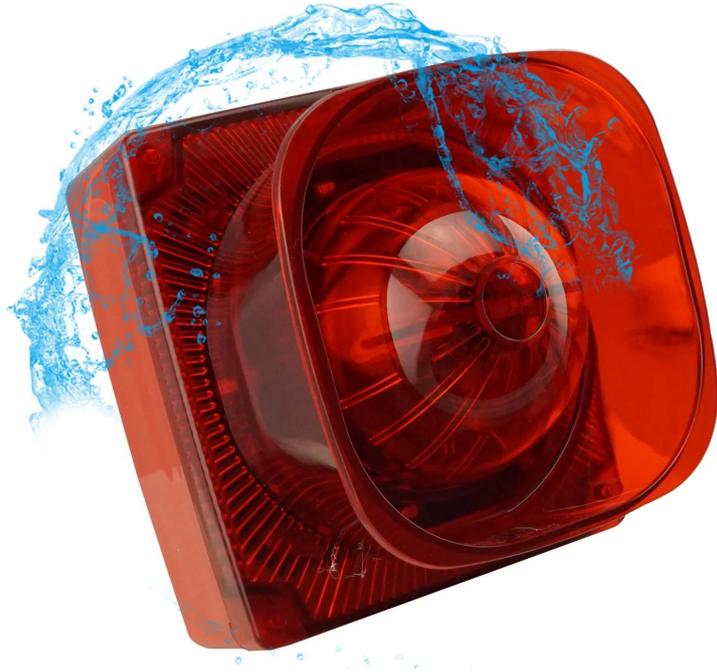


4 wires 8 tones

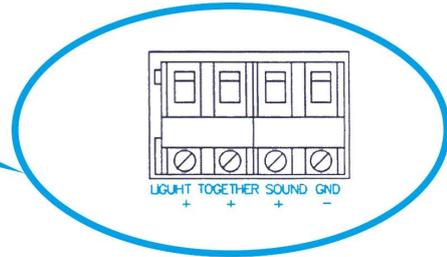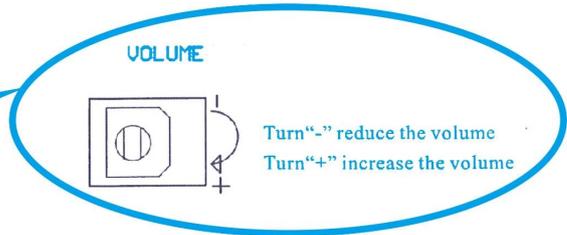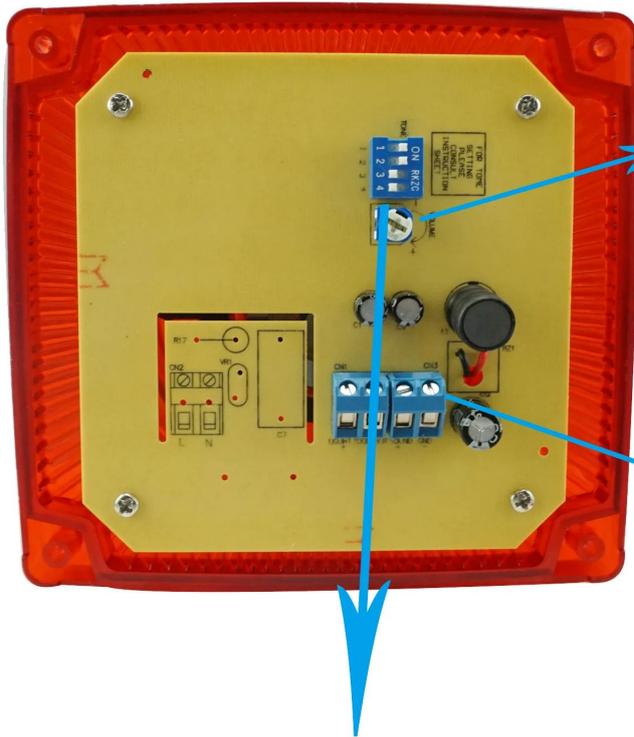

Code setting	Operating Voltage DC12V, switch "NO" to "0"		
Switch 123	Sound species	Pulse description	DB level
LLL/000	119	High level 180uS,low level max:1800uS,min:880us	116+/- 2db
HHL/110	Last"di" 0.7hz	High level 85uS,low level 890us	110+/- 2db
LHL/010	Sounding"du"	High level 115uS,low level 1400us	114+/- 2db
HLL/100	High sound 119	High level 105uS,low level max:1150uS,min:960us	115+/- 2db
LHH/011	Nomal 120	High level 180uS,low level max:2090uS,min:1620us	116+/- 2db
HLH/101	High sounding "di"	High level 95uS,low level 930us	111+/- 2db
LLH/001	120 with fast	High level 180uS,low level max:2090uS,min:1620us	114+/- 2db
HHH/111	High sound 120 with fast	High level 140uS,low level max:1100uS,min:950us	116+/- 2db

8 Types
Voice & light combination
freely adjustable

EB-162 □□□□□□

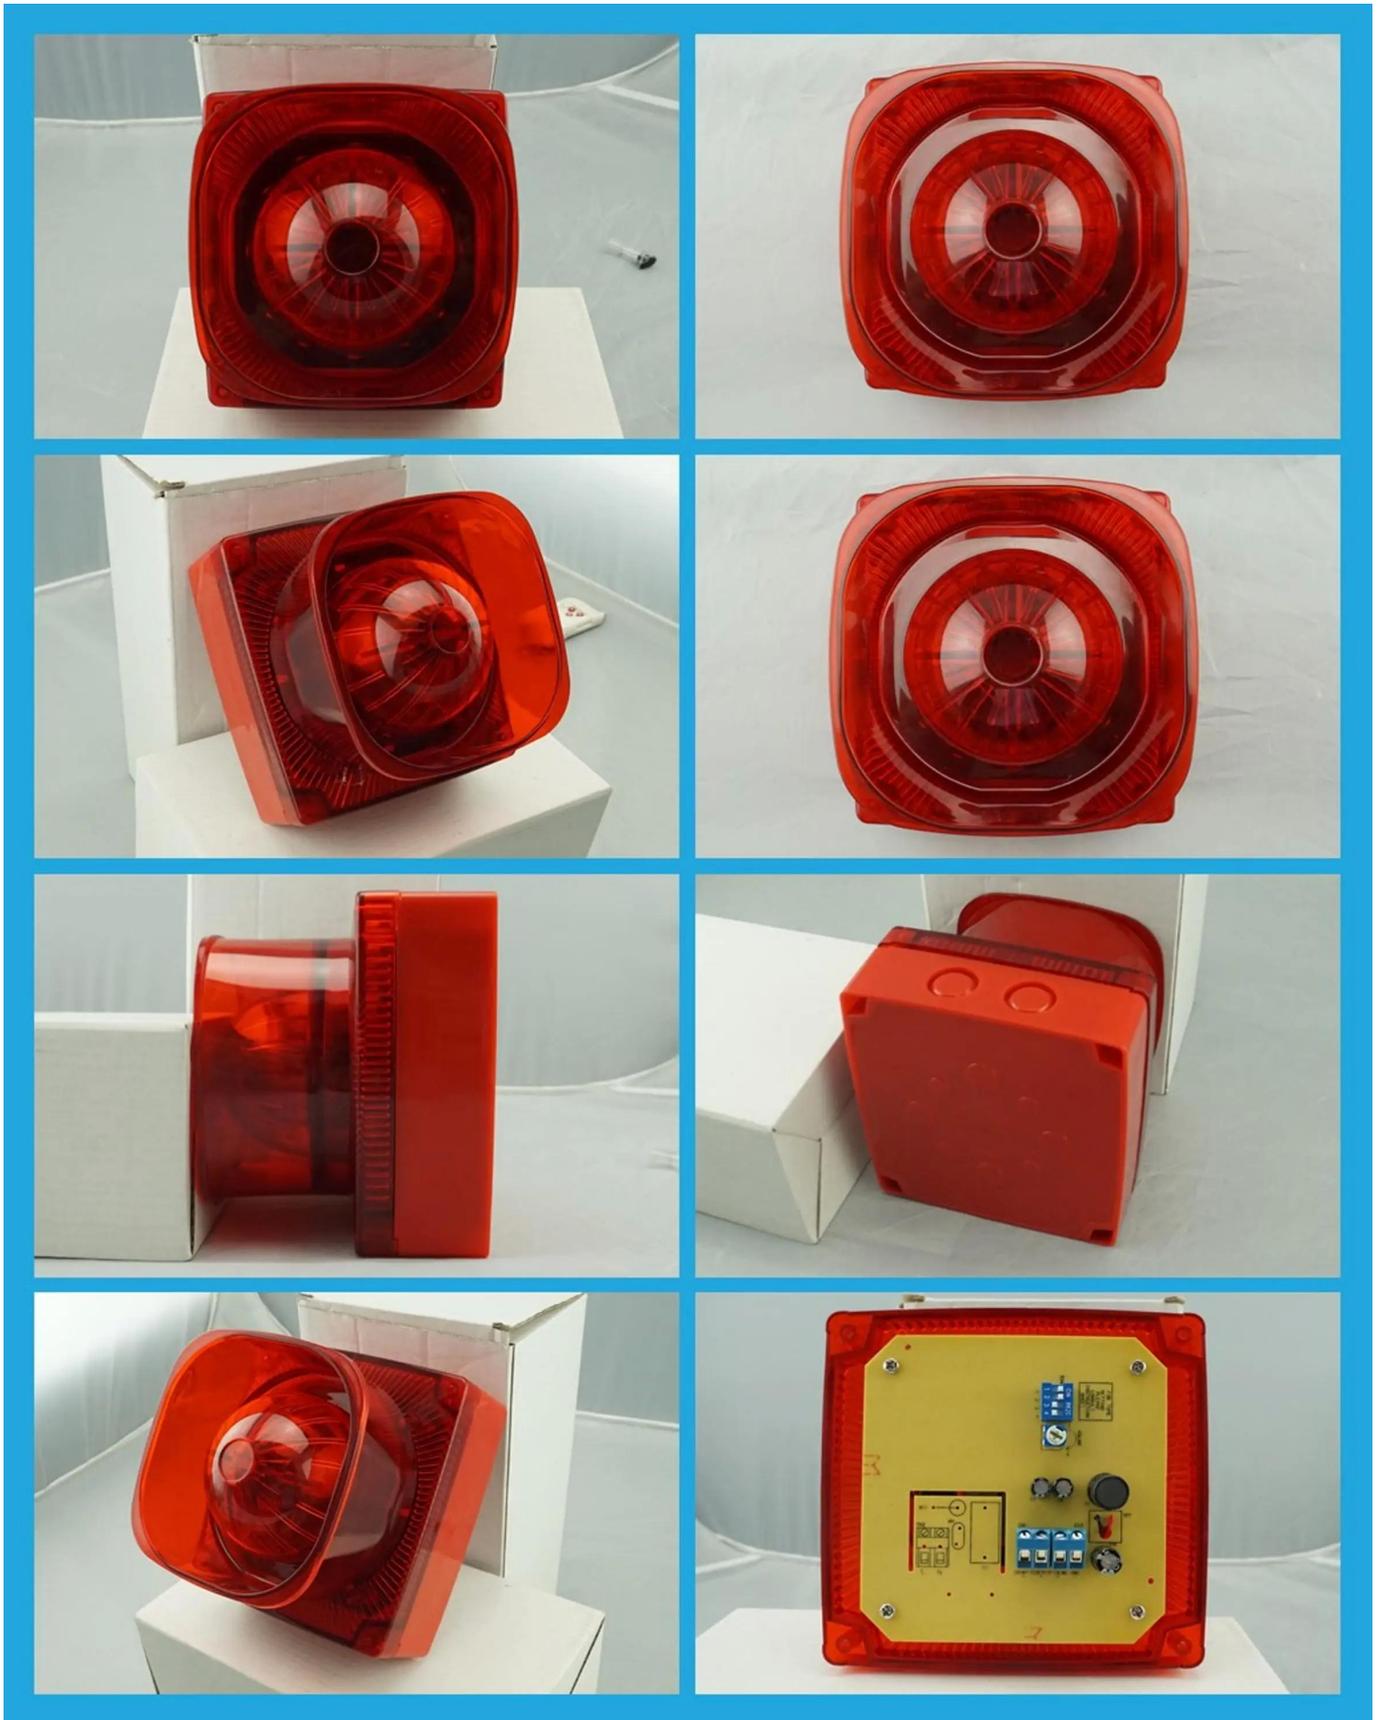

EB-162"□□□□



Where to use ?



Suitable for all kinds of emergency situation!





