

NEW

PRODUCT THE ARRIVAL OF THE GOODS




SMQT

<https://eis.en.alibaba.com/>


THE INTERNATIONAL WEBSITE

LED	
光通量	105db
型号	EB-162
尺寸	126 * 120 * 107mm
电压	DC 12-30V
电流	<40mA
功率	105W
寿命	80000小时
响应时间	< 1.3s
工作温度	-20°C-50°C
存储温度	-20°C-60°C
湿度	95%RH
防护等级	IP67
重量	0.4g




SMQT



Front



Side

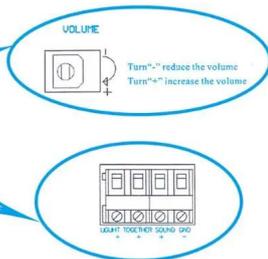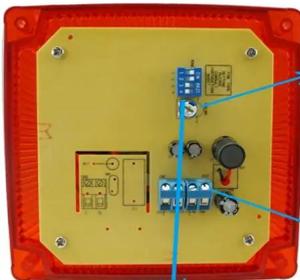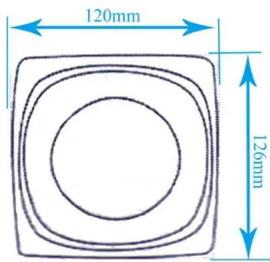

Code setting	Operating Voltage DC12V, switch "NO" to "0"		
Switch 123	Sound species	Pulse description	DB level
LLL/000	119	High level 180us, low level max:1800us, min:880us	116+/-2db
HHL/110	Last "di" 0.7hz	High level 85us, low level 890us	110+/-2db
LHL/010	Sounding "du"	High level 115us, low level 460us	114+/-2db
HLL/100	High sound 119	High level 1105us, low level max:1150us, min:960us	115+/-2db
LHL/011	Normal 120	High level 180us, low level max:2090us, min:1620us	116+/-2db
HLL/101	High sounding "di"	High level 95us, low level 930us	111+/-2db
LHL/001	120 with fast	High level 180us, low level max:2090us, min:1620us	114+/-2db
HHL/111	High sound 120 with fast	High level 140us, low level max:1100us, min:950us	118+/-2db


8 Types
Voice & light combination
freely adjustable



Suitable for all kinds of emergency situation!



□□□□

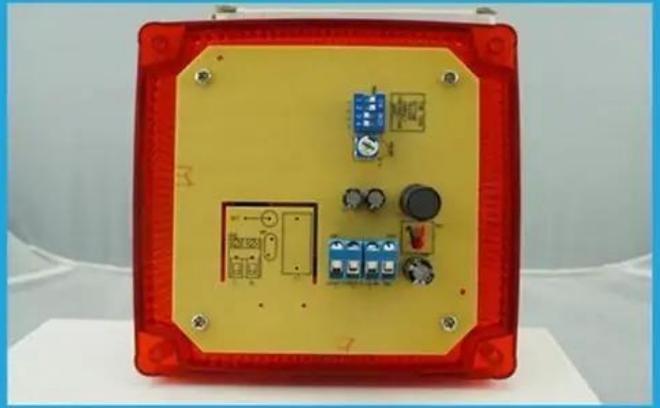

SHOW CASE

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



□□□□



□□





A 1-3 10-15 5000

A EXW MOQ 100

A

A

A

EV1527