

IP66 防水 WG RFID 無線電



EA-92K□□□□□

□□	
□□	EA-92K
□□	96×96×22□□□□
□□□□	12V±3VDC
□□□□	<1□□
□□□□	125Khz ID
□□□□	60□□
□□□□	150□
□□□□	WG26 / WG34
□□□□	1□/ MS
□□□□	4□/ 8□
□□□□	□□□□□
□□	□/□□□□□
□□	□□/□□□□□□□
□□□□	-30℃~65℃
□□	0.2□□



1. 000000000000 00000000; 0LED0000000000000000 00 0000000000
2. 00000000000000 00000000 00000000; 00 000000000000 0000000000000000

3. Wiegand 26/34
- 4.
- 5.

Appearance




Size

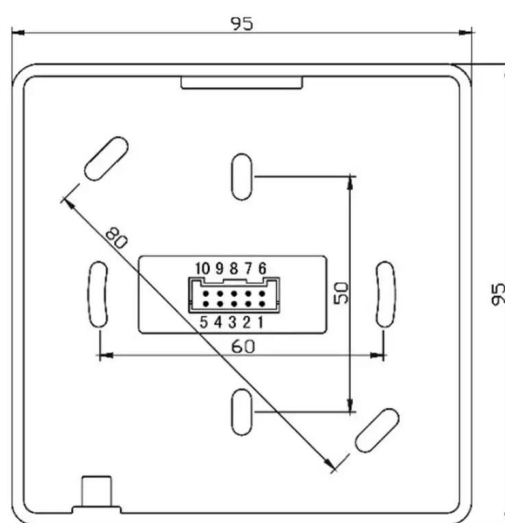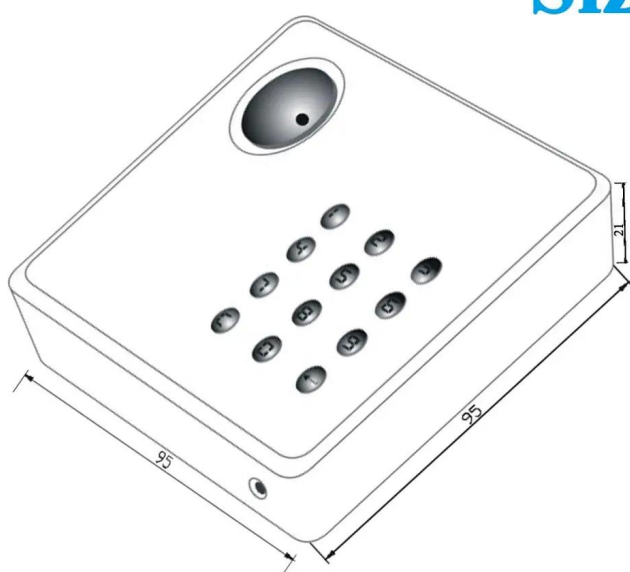


mm

Wire port introduction

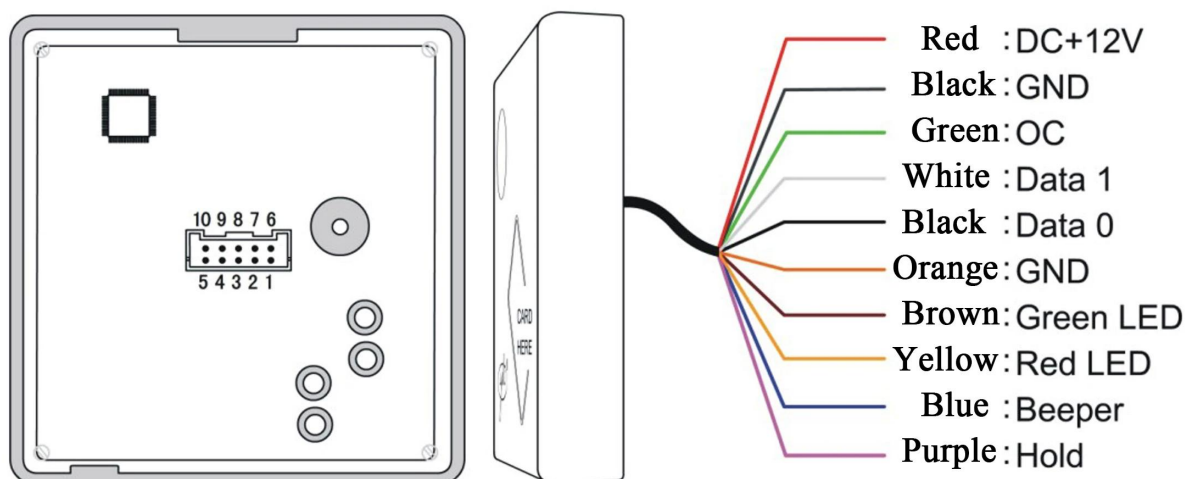

NO	Color	Function	Description
1	Red	12V+	DC Power 12V
2	Black	GND	DC Power 0V
3	Green	OC OUT**	OC Out to output doorbell signal or anti-tamper signal
4	White	DATA1	Wiegand DATA1 Output
5	Black	DATA0	Wiegand DATA0 Output
6	Orange	GND	Signal Grounding
7	Brown	Green LED*	Grounding to display 1 st message and green LED lights up
8	Yellow	Red LED*	Grounding to display 2 nd message and red LED lights up
9	Blue	Beeper	Beeper controller, grounding to work
10	Purple	Hold	Card reading controller,grounding to stop therefore reading

Wire diagram

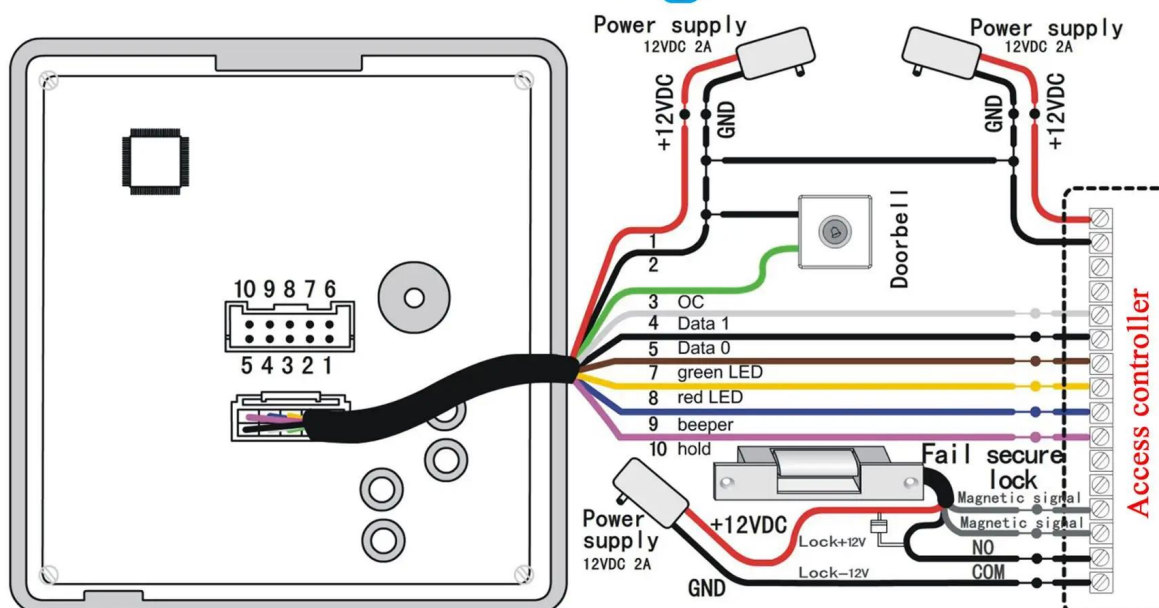

Installation

