

• Parameter

SMQT®

□□□□	□□□□□□□□
□□	EA-21A / EA-21B
□□	EA-21A□85×52×25□mm□EA-21B□86×86×39□mm□
□□□□	DC 12V
□□□	<115°
□□□□	< 4W
□□□□	10□20cm
□□□□	NO / NC / COM
□□□□	500.000□□□
□□□□	□□□□
□□	□□□
□□	□□□□□□□□
□□□□	0□95□
□□□□	-20°C-50°C
□□	EA-21A□0.046kg EA-21B□0.106kg

• Introduction

SMQT®



EA-21A



EA-21B



No touch infrared induction door release button

500000 times mechanical test


LED back light indication

Stainless steel panel,wire drawing finished

Welcome OEM&ODM

• Installation

SMQT®

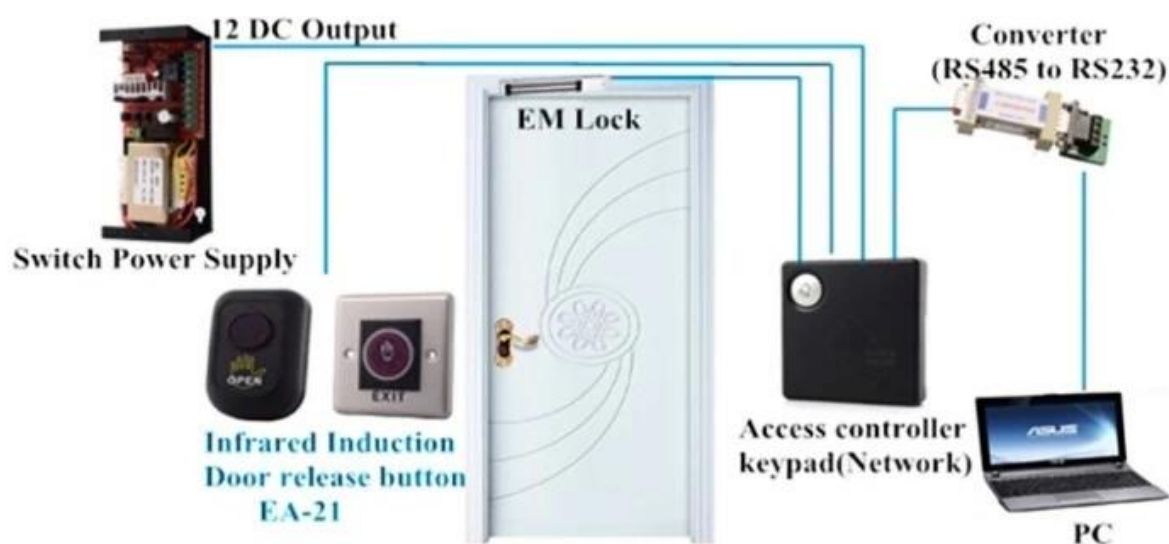

• Packaging & shipping

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

