




□□□	□□□□□□□□tcp / ip□□□		
□□□	EA-904	□□□□□	400MHz□
□□□□□	Linux□	□□□□□	□□10.93 quard□□
LCD□□□	2.8" TFT□□□□□	□□□□□	0.6sec
□□□□□	3000□10000/30000/50000 □□□	□□□□□	80000/120000/300000
□□□□□	RS485□TCP / IP□USB□USB□ □	□□□□□	□□□RFID□□□□
□□□	□□□□□□	□□□	220□□*80□□*26□□
□□□□□	5VDC	□□□□□□□	□□□□□□□
□□□	175□□*120□□*30□□	□□□□□	1000□□□+1000□□

□□□□□□□□□□□□□□□□

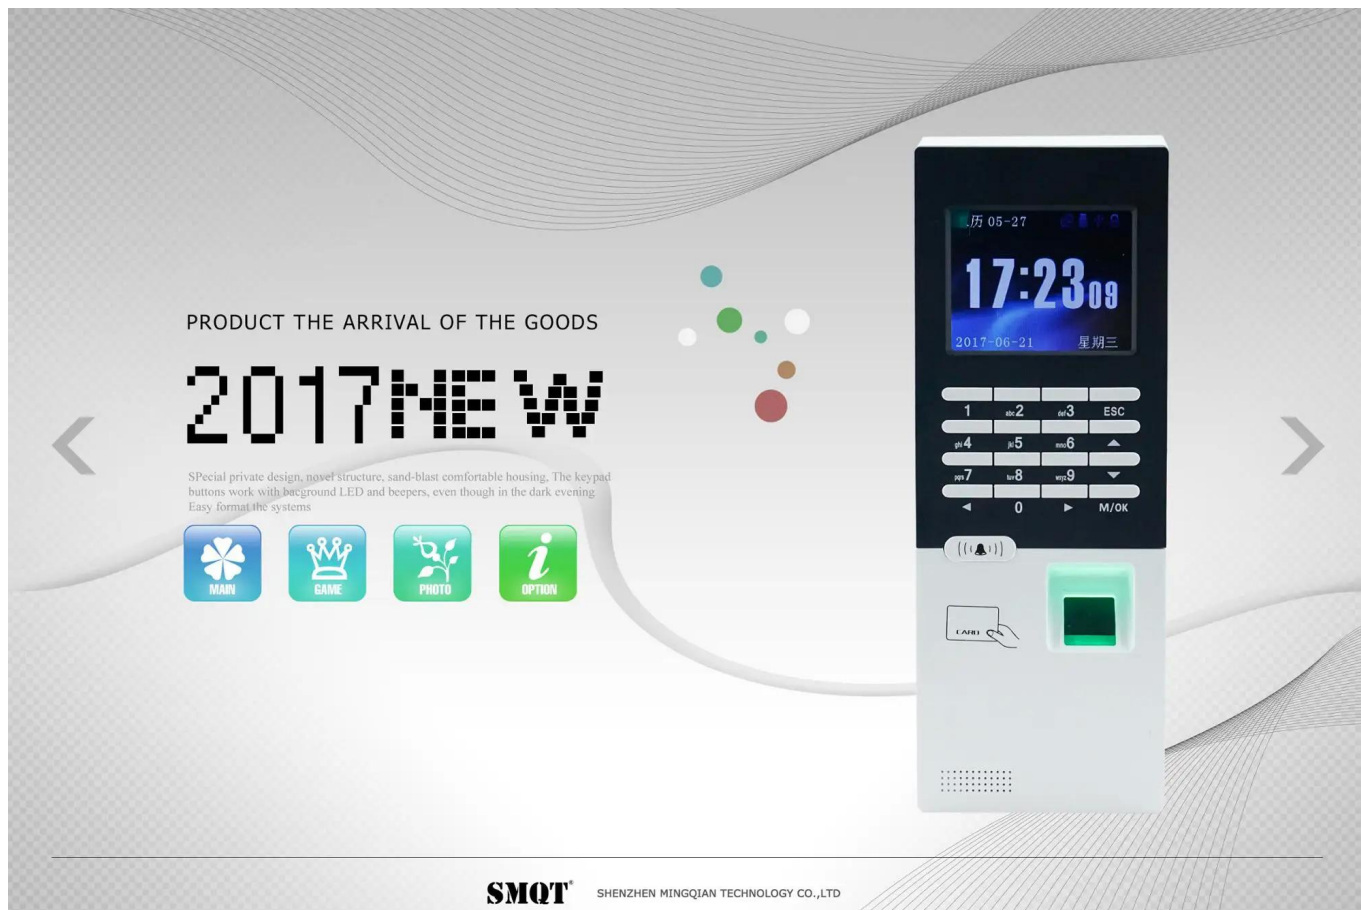

LCD Dimension: 2.8" TFT color display

Verification Mode: fingerprint, RFID card, password

Fingerprint Capacity: 3000(10000/30000/50000 are customrized)

Communication Format: RS485,TCP/IP, USB,USB driver

Language: English, Chinese, etc.

Transaction Capacity: 80000/120000/300000

Algorithm Version: Version 10.93 quard Core

Verification Speed: 0.6sec

□□□□□



SHOW CASE



□□□□



□□



□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



