


Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA
RS-232 interface, DB9(holes)
RS-422/RS-485 interface,DB9(pin) with 6 terminals
300-115.2kbps transmission speed
Twisted-pair cables as transmission medium
With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning
strike and surge power of each line.
3500VRMS isolation
500VDC isolation voltage

SMQT

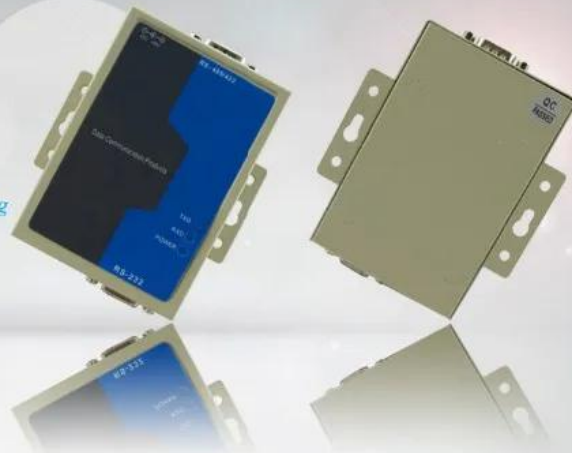

□□□□	□□□□PC rs485□□□□RS232,1200M□□□
□□	EA-05
□□	90L * 65W * 25.5H□mm□
□□□□	DC 9V
□□□□	□□□□EIA / TIA RS-232C□RS-485 / RS-422□□
□□□	RS-232C□□DB9□□□□□□□□RS-422 / RS-485□□DB9□□□□□□□□□□□□
□□□□	□□□□□TXD RXD POWER
□□□□	□□□□□□
□□□□	300-115.2KBPS
□□□□	RS-232□□ $\pm 15\text{KVESD}$ □□□□RS-422 / RS-485□□□□□600W□□□□□□□□
□□	3500VRMS
□□	□□
□□	□□□□
□□□□	5□□95□
□□□□	0°C□50°C
□□	0.62□□

□□□□rs485□□□□□□□□□□□□



EA-05

Converter RS232 to RS485

**Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard**

Electrical Interface:

**RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector**

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection


Working Humidity: 5%~95%

Environment temprature: 0 ℃ ~ 50 ℃

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty



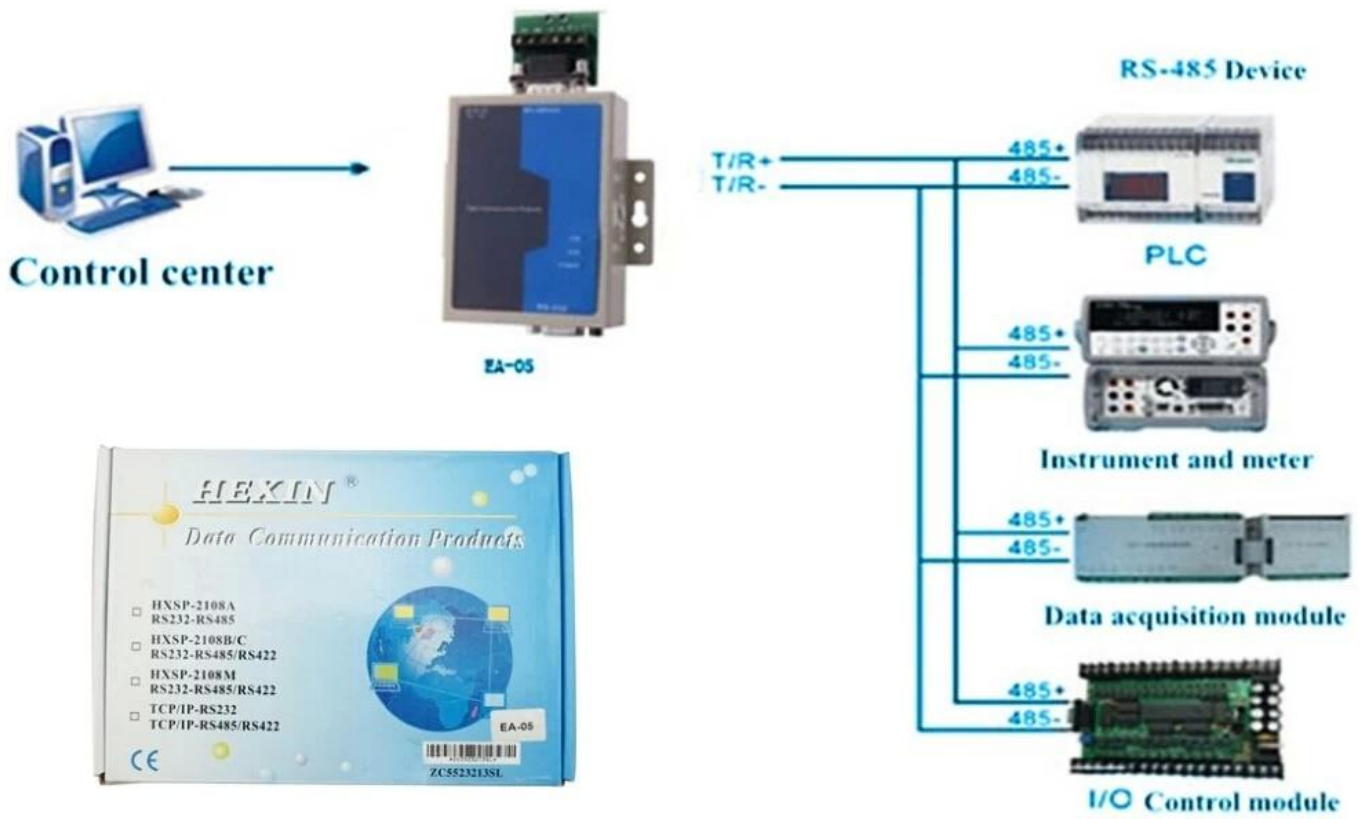

00000



00







Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer

