


Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA
RS-232 interface, DB9(holes)
RS-422/RS-485 interface,DB9(pin) with 6 terminals
300-115.2kbps transmission speed
Twisted-pair cables as transmission medium
With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning
strike and surge power of each line.
3500VRMS isolation
500VDC isolation voltage



•Parameter

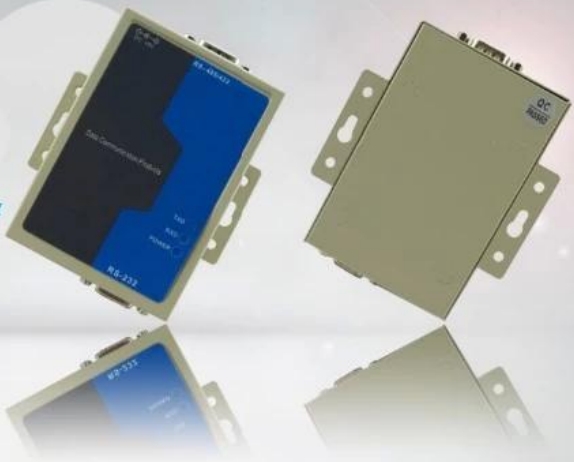

尺寸	90L * 65W * 25.5Hmm
电压	DC9V
接口	符合EIA / TIA RS-232C RS-485 / RS-422
接口	RS-232C DB9 RS-422 / RS-485 DB9
速率	300-115.2KBPS
接口	TXD RXD POWER
接口	RS-232
接口	RS-232 $\pm 15\text{KVESD}$ RS-422 / RS-485 600W
接口	3500VRMS
接口	500VDC
接口	5095
接口	0°C 50°C

•Introduction



2rs485 rs422 dc



• Feature

SMQT



EA-05

Converter RS232 to RS485

**Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard**

Electrical Interface:

**RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector**

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

● **Installation**

SMQT

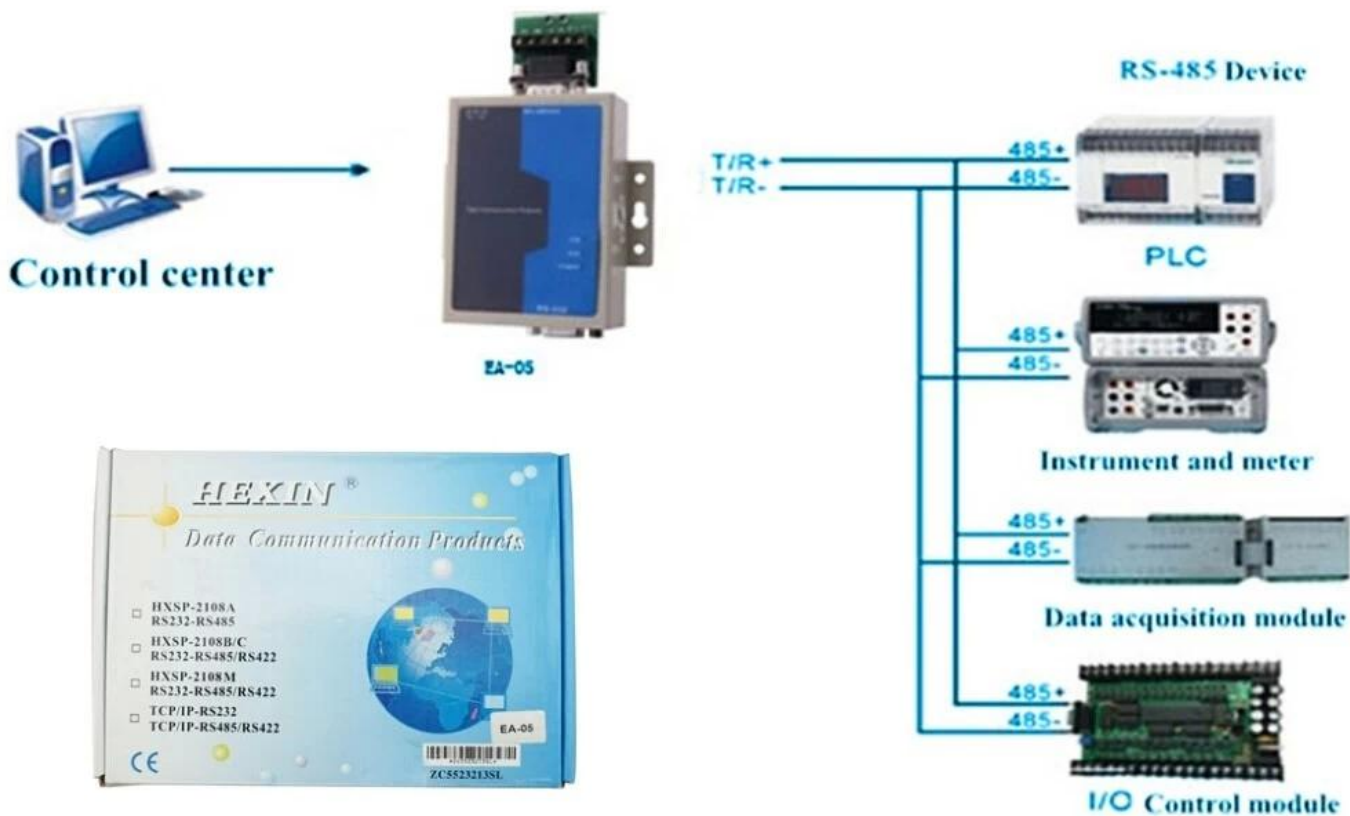

• Show case

SMQT



• Packaging & shipping

SMQT



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

