

Wired magnetic contact sensor

NC/NO mode optional


20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

White/Brown color optional

12g weight

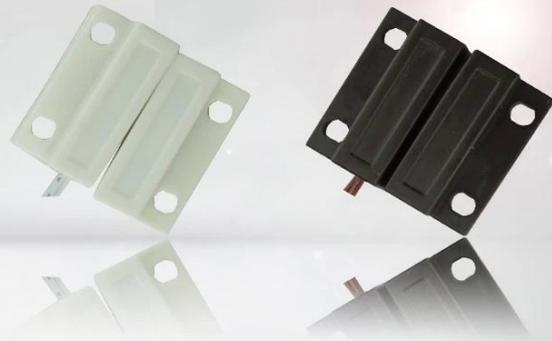

• Parameter

SMQT®

□□	
□□□□	□□□□□□□□
□□	EB-133
□□	27×41×8□mm□
□□	NO / NC□□□□
□□	20±5□mm□
□□□□	≤100VDC
□□□□	≤500mA
□□□□□□	≤10W
□□	□□/□□□□□□
□□	□□□□□□
□□	□□ABS□□
□□□□	-10°C□50°C
□□	12g

• In-kind shooting

SMQT®



• *Feature*

SMQT®



EB-133

Dimension:27×41×8(mm)

Fireproof ABS material shell

NC/NO mode optional(NO mode need OEM)

Max voltage≤100VDC, Max current≤500mA

Suitable for wooden door or window

White/Brown color optinal

12g weight

2 years quality warranty,welcome OEM

•Packaging & shipping

SMQT

	□□□□
□□□□	□□□□□□ EB-133
□□	□□1600□
□□□□	38 * 30 * 30□cm□
□□	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....