



•Parameter

SMQT®

□□	
□□ □□	OLED □□□□□□IC□□□□□
□□	EA-83DK
□□	96×96×22□□□□
□□□□	12V±3VDC
□□	< 2W
□ □□	13.56MHz□IC
□□ □□	60□□
□□ □□	10000
□□ □□	10000
□□ □□	RS485
□□ □	9600□N□8,1□
□□ □□	4M □FLASH□□□
□□□□	PC
□□	□/□□□□□
□□□	□/ □□□
□□ □□□	-30°C□65°C
□□□□	□/ □+□□/ UID +□□/□□□□
□ □□	0.24□□

•Introduction

SMQT®



• Dimension

SMQT®



• *Feature*

SMQT

Single door access control keypad

IC(13.56Mhz) card type

100000 user capacity

OLED display screen




RS485 communication format

Free software

• *Installation*

SMQT

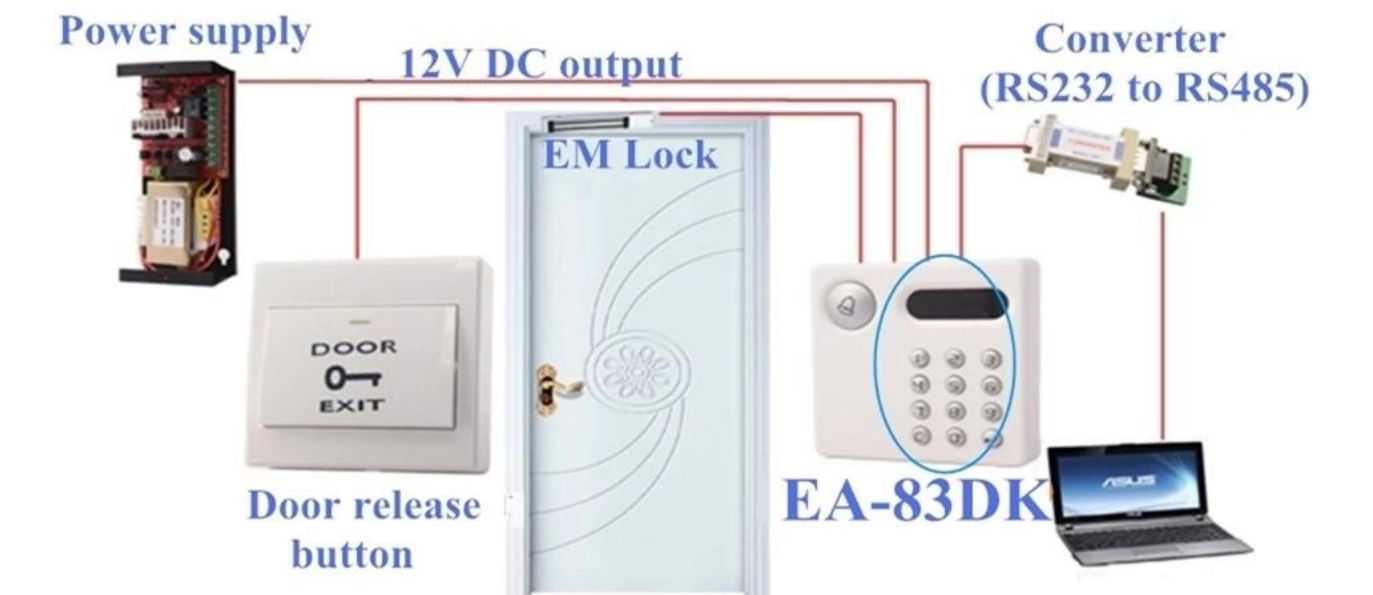

•Packaging & shipping

SMQT®

	□□□□
□□□□	EA-83DK OLED□□□□IC□□□□□
□□	□□36□
□□□□	45 * 32 * 32□cm□
□□	9□□



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

