

RFID 13.56MHz 26 34



EA-63



EA-63

RFID	RFID 13.56MHz
Model	EA-63
Power	DC 12V
Read Range	<100
Frequency	IC 13.56MHz
Interface	WG26 / WG34
Dimensions	515
Material	> 80
Protection	IP66
Size	85 * 45 * 18
Weight	6
Wiring	12V + / GND / D0 / D1 / LED / WG
IC	IC

ABS	ABS+PCB
PCB	PCB
0.1	0.1
2	2
OEM	OEM

EA-63



1. Plastic waterproof door access control IC(13.56MHz) card reader

2. Working voltage DC 8~15V

3. Working current <100mA

4. Card type IC(13.56MHz) Mifare card

5. WG26/WG34 adjustable

6. Reading distance 5~15cm

7. Transmitting distance >80m(from reader to controller)

8. Waterproof **IP66**(suitable for outdoor use)

9. Wire port: DC+ / GND / D0 / D1 / LED / WG, 6 wires


10. Suitable for all kinds of IC door access control system

11. 2 years warranty , welcome OEM

EA-63



EA-63

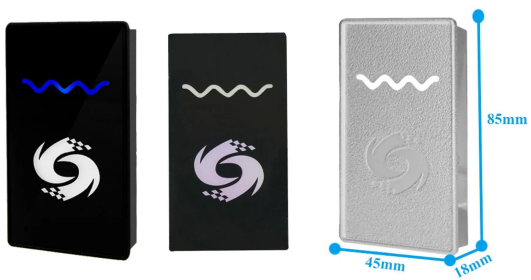

WHICH SYSTEM IS SUITABLE FOR?



Wiring diagram


How to adjust WG26/WG34 output?

WG34

Connect the purple and black wires of the card reader to the controller's GND connector.

WG26

Do not connect the card reader's purple wire.

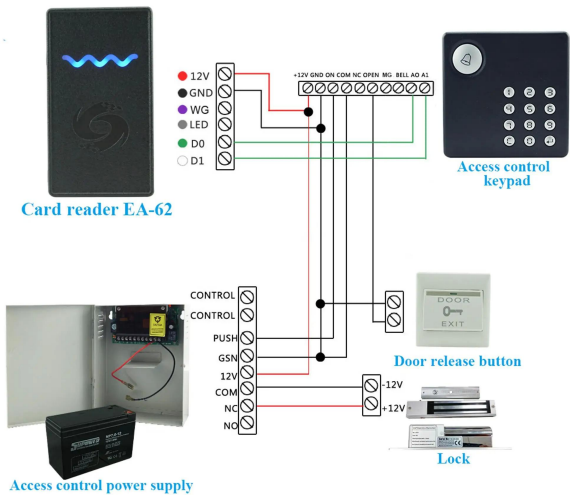

Application site



Apartment



Villa




Home



School



Hospital



Document Room

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

