


IP66RFIDEA-63



RFID	IP66RFID
Model	EA-63
Size	85*45*18mm
Frequency	IC13.56MHz / ID125KHz
Protocol	WG 26 / WG34
Temperature	-30~70
Voltage	12VDC
Power	<60mW
Humidity	-25~70degree
Material	PC
Weight	50g
Package	PC+ PCB
OEM	OEM
Lead time	2w

EA-63

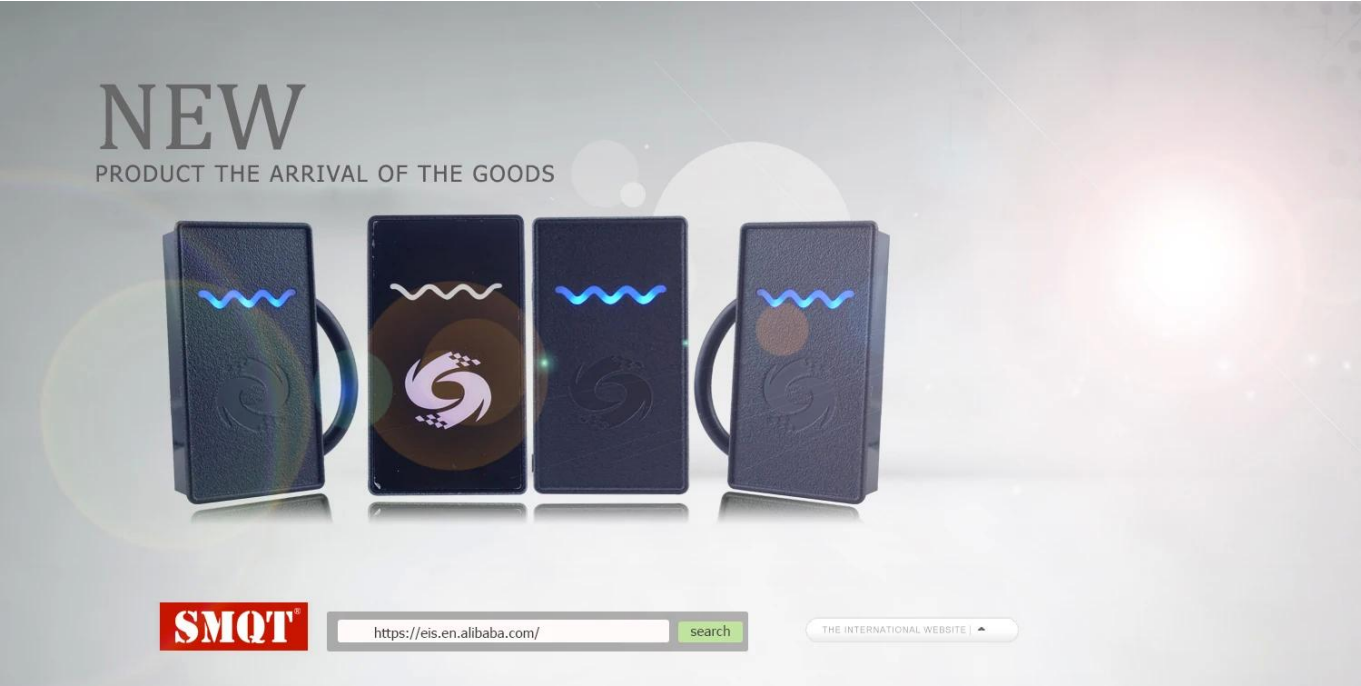

1. Waterproof access control RFID card reader

2. IC(13.56MHz)/ID(125KHz) optional

3. WG26, WG34 optional

4. Waterproof IP66 level

5. Power supply 12V DC

6. 2 years warranty , welcome OEM


EA-63□□□□□□□□



EA-63



□□□□□□

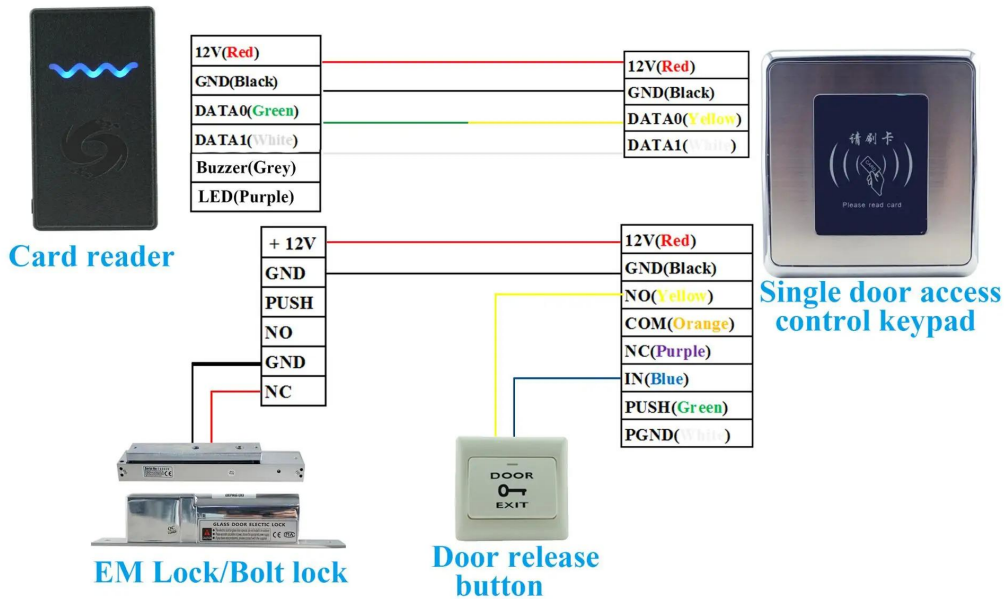

Where to use it?



This type card reader suitable for all kinds of access control system project for :
Office, Hotel, Bank, Apartment, Government building, Laboratory etc.

□□□□□

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT□□□



□□□□



□□□□

2011 Brazil Fair



2012 shen yang Fair




2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair







30/70

AT SIGHT/90DAY



A

A 1-3 10-15 5000

A EXW MOQ 100

A

A