

9V



	Ø106mm*59
	9V 6F22
	≤15uA
	≤56mA
	1
	[Red LED
	[Red LED
	85/
	-10°C50°C
	≤95RH
	<100m
	EN14604
	40 612 20 6



9V 6F22 battery,wireless output 315MHz or433MHz

Sound&flash alarm wireless fire alarm smoke detector

Dust-proof,moth-proof and anti-Interference function


Suitable for detecting the smoke in house,shop,hotel...

2 years quanlity,welcome to do OEM and ODM

□□□□□



Standalone Gas detector

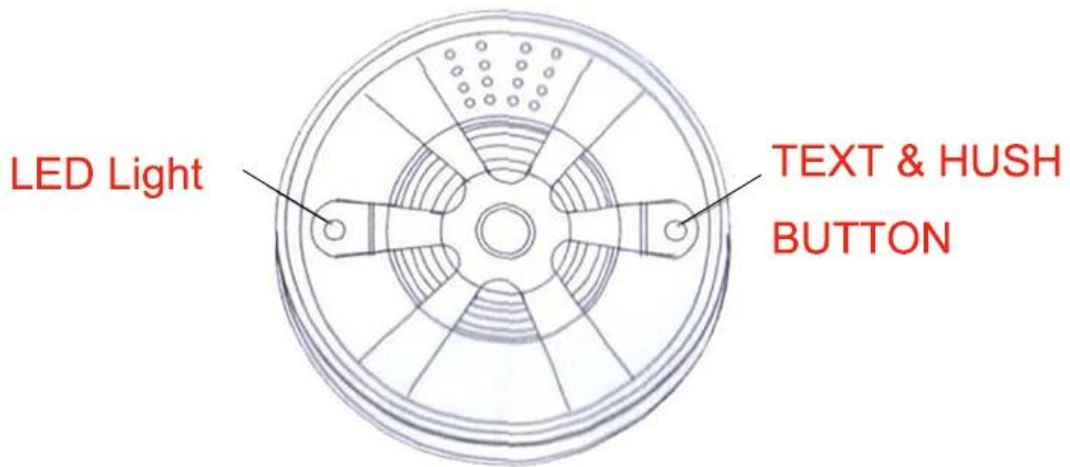


The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.


□□□□

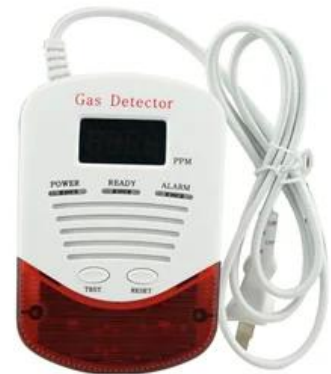

□□□□



□□



□□

2011 Brazil Fair



2012 shen yang Fair




2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair





111111

□□□□

□ □ □ □ □ □ □ □ □ □

