


Wired embedded magnetic contact

NC/NO mode optional
35±5(mm) gap distance
Max voltage≤100VDC, Max current≤500mA
Suitable for metal door or window
White/Brown color optional
24g weight

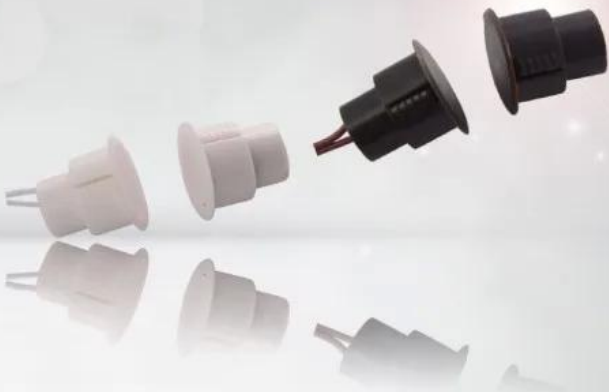

产品型号	SMQT-1925
尺寸	Φ19*25mm
额定电压	12V DC 额定电流23A
使用寿命	2-3year
额定电流	≤500mA
MAX电压	≤100VDC
MAX功率	≤10W
工作模式	NO / NC
材质	ABS
公差	20±5mm
重量	24g
包装	8个

SMQT-1925



EB-136



Dimension: $\phi 19 \times 25(\text{mm})$

Material: ABS

Max Gap: $\leq 40\text{mm}$

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.



□□□□□









□□



□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



A EXW 100

A

A

A

EV1527