

SMQT



EB-114	
Model	SMQT EB-114
Size	86 * 86 * 60mm
Voltage	12VDC
Current	≤330uA DC 12V
Power	≤17.5mW DC 12V
Relay	NC / NO
LED indicator	Yes
LED indicator	Yes
Material	ABS
Operating temperature	-20°C~50°C
Storage temperature	-25°C~65°C
Weight	160g

EB-114



1.Reset Conventional fire alarm emergency manual call point

2.Power supply 12V DC

3.Standby current 330uA, Alarm current 17.5mA(DC 12V)

4.Indicator light: Green:power, Red: Alarming

5.Suitable for fire alarm system

6.Feature:key set

7.2 years warranty , welcome OEM


EB-114□□□□□□□□





EB-114






EB-114

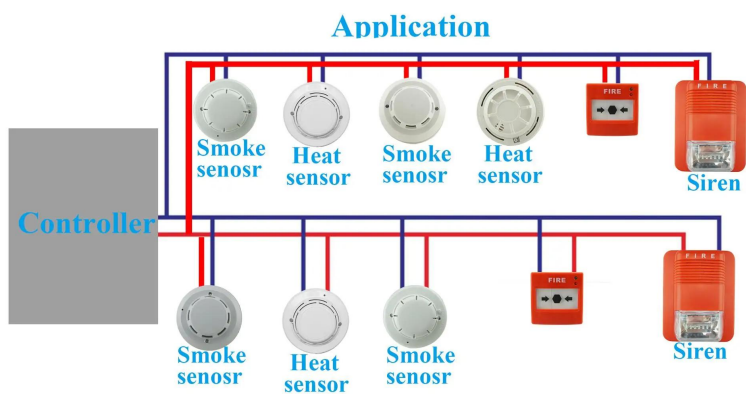

How to reset the button?



Where to use?



□□□□□□

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



□□□□□□



□□□□



□□□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair







