

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wieght: A:210g B:280g C:290g



Parameter

SMQT

Model	EB-137
Dimensions	106×38×10mm
Contact Type	NO / NC
Gap Distance	60±10mm
Max Voltage	≤100V DC / ≤12VDC
Max Current	≤500mA
Max Power	≤10W
Material	Alloy
Weight	A:0.21Kg B:0.28Kg C:0.29Kg
Frequency	433Mhz / 1527
Range	<100m

In-kind shooting

SMQT




• *Feature*

SMQT

EB-137A

EB-137B

EB-137C

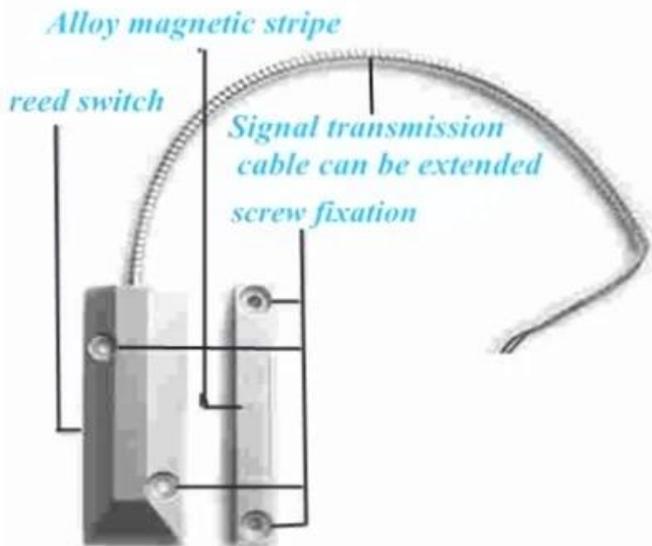

• **Packaging & shipping**

SMQT

□□□□	
□□□□	□□□□□□□□□□ EB-137
□□	□□50□
□□□□	38 * 30 * 30□cm□
□□	10□17kg



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair