


00000		
	Ø106mm*59 <u>□</u> □	
	9V 6F22□□	
	≤15uA	
	≤56mA	
	[Red LED	
	[Red LED[]	
	85/_	
	-10°C[]50°C[]	
	≤95∏RH	
00000	<100m	
	EN14604	

## Standalone Gas detector



The detector adopts the reflection principle of smoke particles that can reflect infrared light The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.

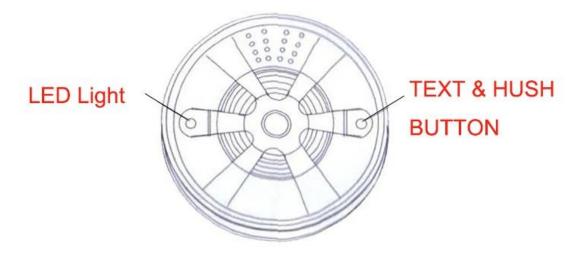

Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.













## **SHOW CASE**

































Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer