


IP66 CPU



		IP66 CPU
尺寸		96*96*22
电压		9VDC-16VDC
电流		≤120mA
频率		13.56MHz
响应时间		<0.1s
工作温度		3.5-5.5
存储温度		< 100
湿度		±15v
精度		0°C~60°C
寿命		-20°C~70°C

IP66 CPU

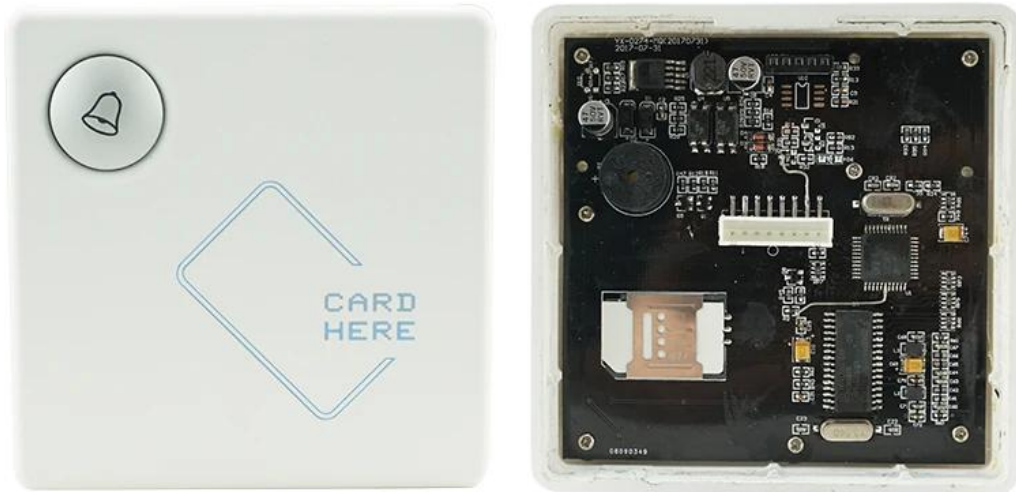

Support CPU SHC1112 card

Support the ISO14443a protocol

Card number and key can be user-defined

Fully sealed design epoxy seal and waterproof type

Wiegand 26 communication interface, 26-122 bit output

□□□□□



CPU Card Reader



GND	9-16V DC	D0	D1	Buzzer	LED	RS232-TX	RS232-RX
-----	----------	----	----	--------	-----	----------	----------

Can work with different access control accessories :



Power Supply



EM Lock



Bluetooth Door Button



Dual Doors Access Control



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技




SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技




SMQT[®]
铭汗科技



SMQT[®]
铭汗科技





2011 Brazil Fair



2012 shen yang Fair




2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair





□□□□

□□□□□□□□□□

15 ☐ ☐ ☐ ☐

