

NEW

PRODUCT THE ARRIVAL OF THE GOODS

Appearance of the patent, Has the opposite of current protection, Import PC material, heat resistance, corrosion resistance is strong, free manage software, 3 years quality warranty, welcome OEM



SMQT

<https://eis.en.alibaba.com/>

search

THE INTERNATIONAL WEBSITE | ^

□□	
□□□□	8□□□□□□105dB□□□□□□□□□□□□□□□□
□□	EB-162
□□	126 * 120 * 107□□□□
□□□□	DC 12□30V
□□□□	<40mA□□□□□□□□
□□	105□□
□□□	8□□□□□□□□□□□□□□□□
□□□□□	< 1.3s
□□□□	-20°C□50°C
□□□□	□□
□□□□□	□□□LED□
□□□□	95□RH
□□□□	-20°C□60°C
□□	□
□□	0.4□□



1.Wired outdoor emergency flash strobe siren

2.DC 12V~30V power supply

3.Operating current \leq 40mA


4.Sound pressure 105db

5.8 sound and flash light models are adjustable freely


6.2 years warranty , welcome OEM







□□□□



Front



Side



Code setting	Operating Voltage DC12V, switch "NO" to "0"		
Switch 123	Sound species	Pulse description	DB level
LLL/000	119	High level 180uS, low level max:180uS, min:80uS	116(+/-)2db
HHL/110	Last "di" 0.7hz	High level 85uS, low level 890us	110(+/-)2db
LHL/010	Sounding "di"	High level 115uS, low level 400us	114(+/-)2db
HLL/100	High sound 119	High level 105uS, low level max:1150uS, min:360uS	115(+/-)2db
LHL/011	Normal 120	High level 180uS, low level max:2090uS, min:1620us	116(+/-)2db
HHL/101	High sounding "di"	High level 95uS, low level 930us	111(+/-)2db
LLH/001	120 with fast	High level 180uS, low level max:2090uS, min:1620us	114(+/-)2db
HHL/111	High need 120 with fast	High level 140uS, low level max:1100uS, min:950us	116(+/-)2db

8 Types
Voice & light combination
freely adjustable



Suitable for all kinds of emergency situation!



□□□□



□□□□

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技




SMQT
铭汗科技



SMQT
铭汗科技



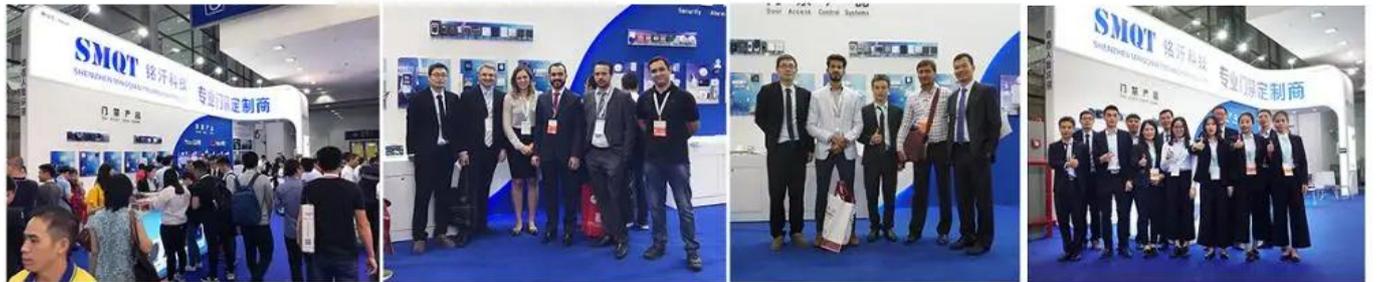



PACKAGING & SHIPPING

Detection+Packing+Sealing+Finishing+International Express

