

□□□□/□□□□□□□9V DC-36V□□□□□□



□□□□	
□□□	□□□□/□□□□□□□9V DC-36V□□□□□□
□□□□□	9VDC-36VDC
□□□□□	≤50uA
□□□□□	≤50mA
□□□□□	-10℃□85℃
□□□□□	57℃
□□□□□	□□□□/□□□□
□□□□□	20□□□
□□□□	□□□□35□
□□□□□	□□□□
□□□□□□	□□□□□□□

□□□□□9V DC-36V□□□□□□□□□□□□



Power reset / auto-reset with Red LED indicator

High precision hear sensor ceiling mounted sensor type

2 years quality warranty for you,welcome OEM and ODM

Detecting Area is 20 square meters,the indecator flash once 35s


Wired 9VDC-36VDC Heat Detector for home security or fire alarm system

□□□□□






Installation Diagram

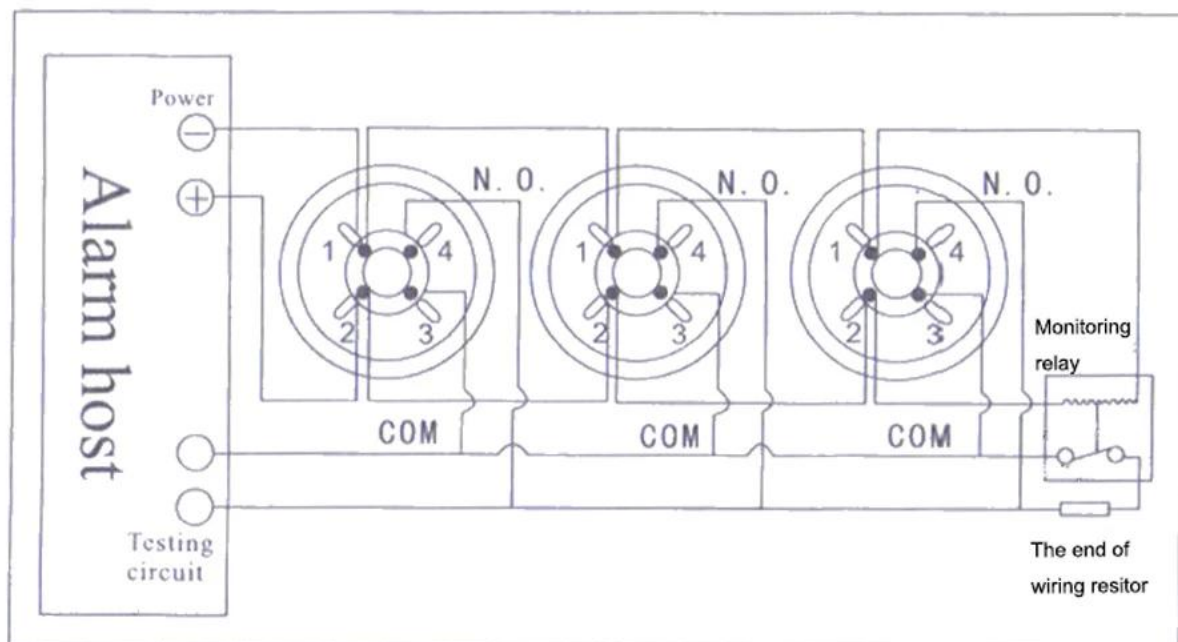

The diagram of 4 wire connection

- 1. Power "-" input
- 2. Power "+" input
- 3. Relay output (COM)
- 4. Relay output (N.O.)

Can work with different home security alarm system

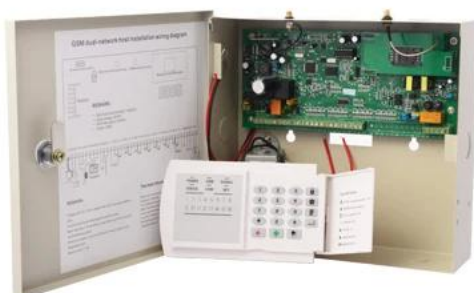

□□□□

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技




SMQT[®]
铭汗科技



□□□□



□□



□□

2011 Brazil Fair



2012 shen yang Fair




2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair





