



• Parameter

SMQT®


	□□
□□□□	□□Pir□□□□□
□□	EB-181
□□	89×52.5×38.5□mm□
□□□□	12V DC
□□□□	18mA 12 DC
□□□□	12m
□□□□	110°
□□□□	NO / NC
□□□□	□□□
□□□□	2.2m
□□	□□ABS□□
LED	ON / OFF□□□□
□□□□	-10°C□50°C
□□□	□□
□□	0.096kg

• Introduction

SMQT®

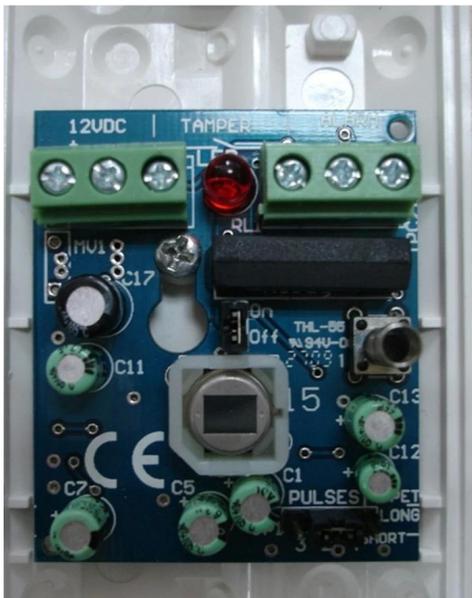


- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB




- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT

Detecting Area View

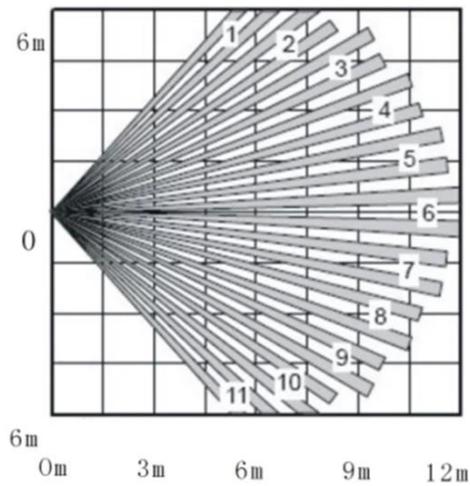

Planform

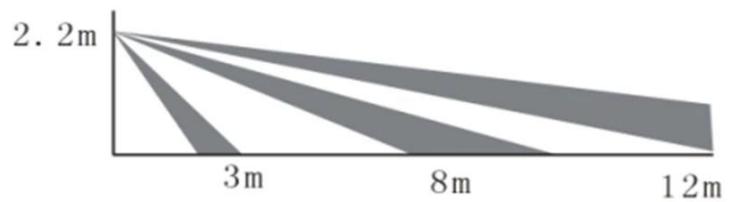

Side View

• Packaging & shipping

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair