

Wired magnetic door contact sensor

NO/NC mode optional


20±5(mm) gap distance

MAX Voltage≤100VDC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS shell,White/Brown color optional

Weight10g

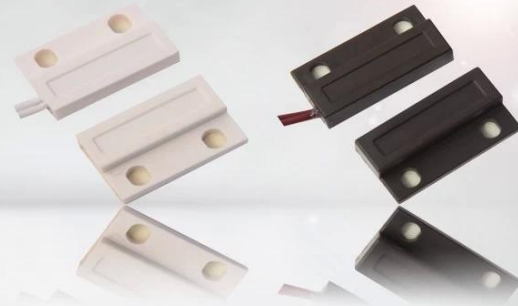

Parameter

SMQT

Model	EB-134
Dimensions	24×41×6mm
Mode	NO / NC
Gap distance	20±5mm
Max Voltage	≤100VDC
Max Current	≤500mA
Max Power	≤10W
Material	ABS
Weight	10g
Operating Temperature	-10°C~50°C

In-kind shooting

SMQT



• *Feature*

SMQT



EB-134

Dimension:24×41×6(mm)

NO/NC mode optional(default is NC mode)

20±5(mm) Gap

MAX voltage≤100VDC,MAX current≤500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

•Packaging & shipping

SMQT

	□□□□
□□□□	EB-134 □□□□□□□□
□□	□□1600□
□□□□	38 * 30 * 30□cm□
□□	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....