

• Parameter

SMQT®

□□	□□□□□□□□
□□	EB-187
□□□	107×59×39.5□mm□
□□□□□	3V DC□2AA□□□□
□□□□	≤25uA
□□□□□	≤15mA
□□□□□	12m
□□□□□	110°
□□□□□	315MHz / 433MHz□2262□□□□□□□□□□
□□□□□	200m□□□□□□
□□□□□	□2.2m
□□□□□	□□□
□□□	□□ABS□□

• Introduction

SMQT®

• Dimension

SMQT®




• Feature

SMQT®

1. ASIC
2. IR
3. RF
4. IR
5. IR
6. SMT

PRODUCT PROFILE

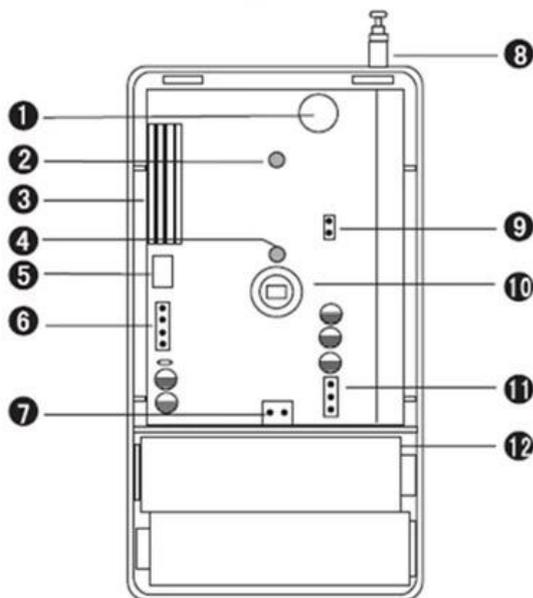


- | | |
|-------------------|----------------|
| ① Filter | ⑦ Power Switch |
| ② Alarm indicator | ⑧ Antenna |
| ③ Code Jumper | ⑨ LED Jumper |
| ④ Low battery LED | ⑩ IR Sensor |
| ⑤ Test button | ⑪ Delay Jumper |
| ⑥ Range jumper | ⑫ Battery |




PIR sensor


Side view

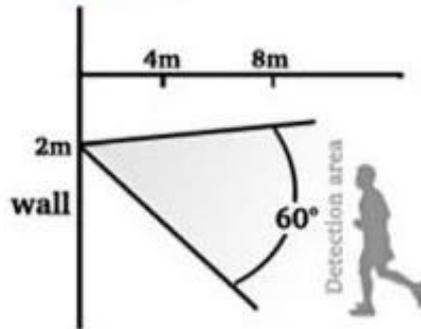


Overhead view

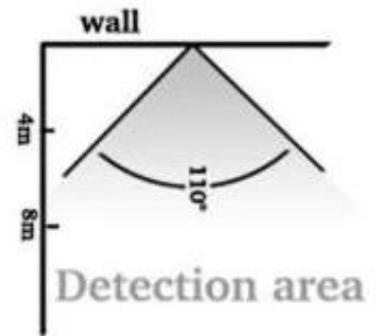

Detecting Area View

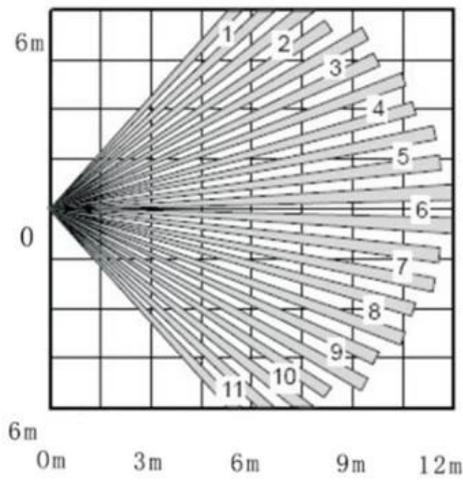

Planform

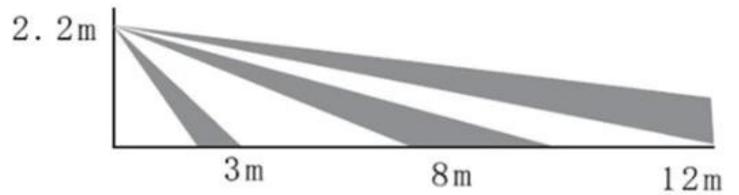

Side View

• Packaging & shipping

SMQT



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair