

Wireless door sensor

Fireproof ABS shell
DC 12V power supply
Wireless frequency 315Mhz/433Mhz optional
Wireless signal transmisson distance max 100m




Parameter


SMQT

Model	EB-130
Dimensions (mm)	71×36×15mm 63×14×14mm
Thickness (mm)	40±5mm
Power supply	12VDC
Operating voltage	≤1V
Frequency	315Mhz / 433Mhz
Transmission distance	< = 100m
Weight	0.035kg

In-kind shooting

SMQT

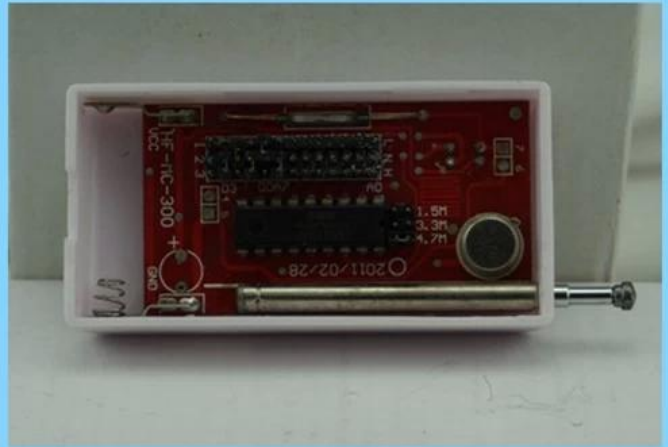

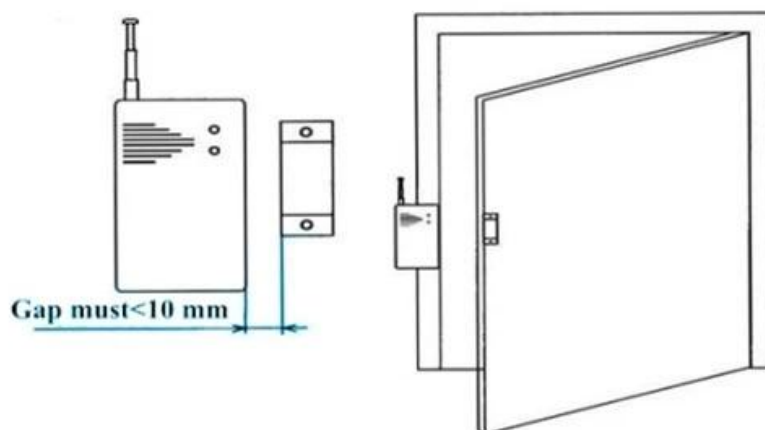

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

•Packaging & shipping

SMQT®

包装	
型号	EB-130 固态硬盘
数量	200个
尺寸	47 * 37 * 29cm
重量	10kg



•Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair





2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair