• Parameter

SMQT

□□	
□□□□	□□□□□□□
□□	EB-130
□□□□	12V
□□□□	40±5□mm□
□□□□	315MHZ / 433MHZ
□□□□	≤100m

• Introduction

SMQT

□□□□□□□□□□□□□□□□□□12v□□□□□□□□□□□□□□□□□□

PRODUCT PICTURE

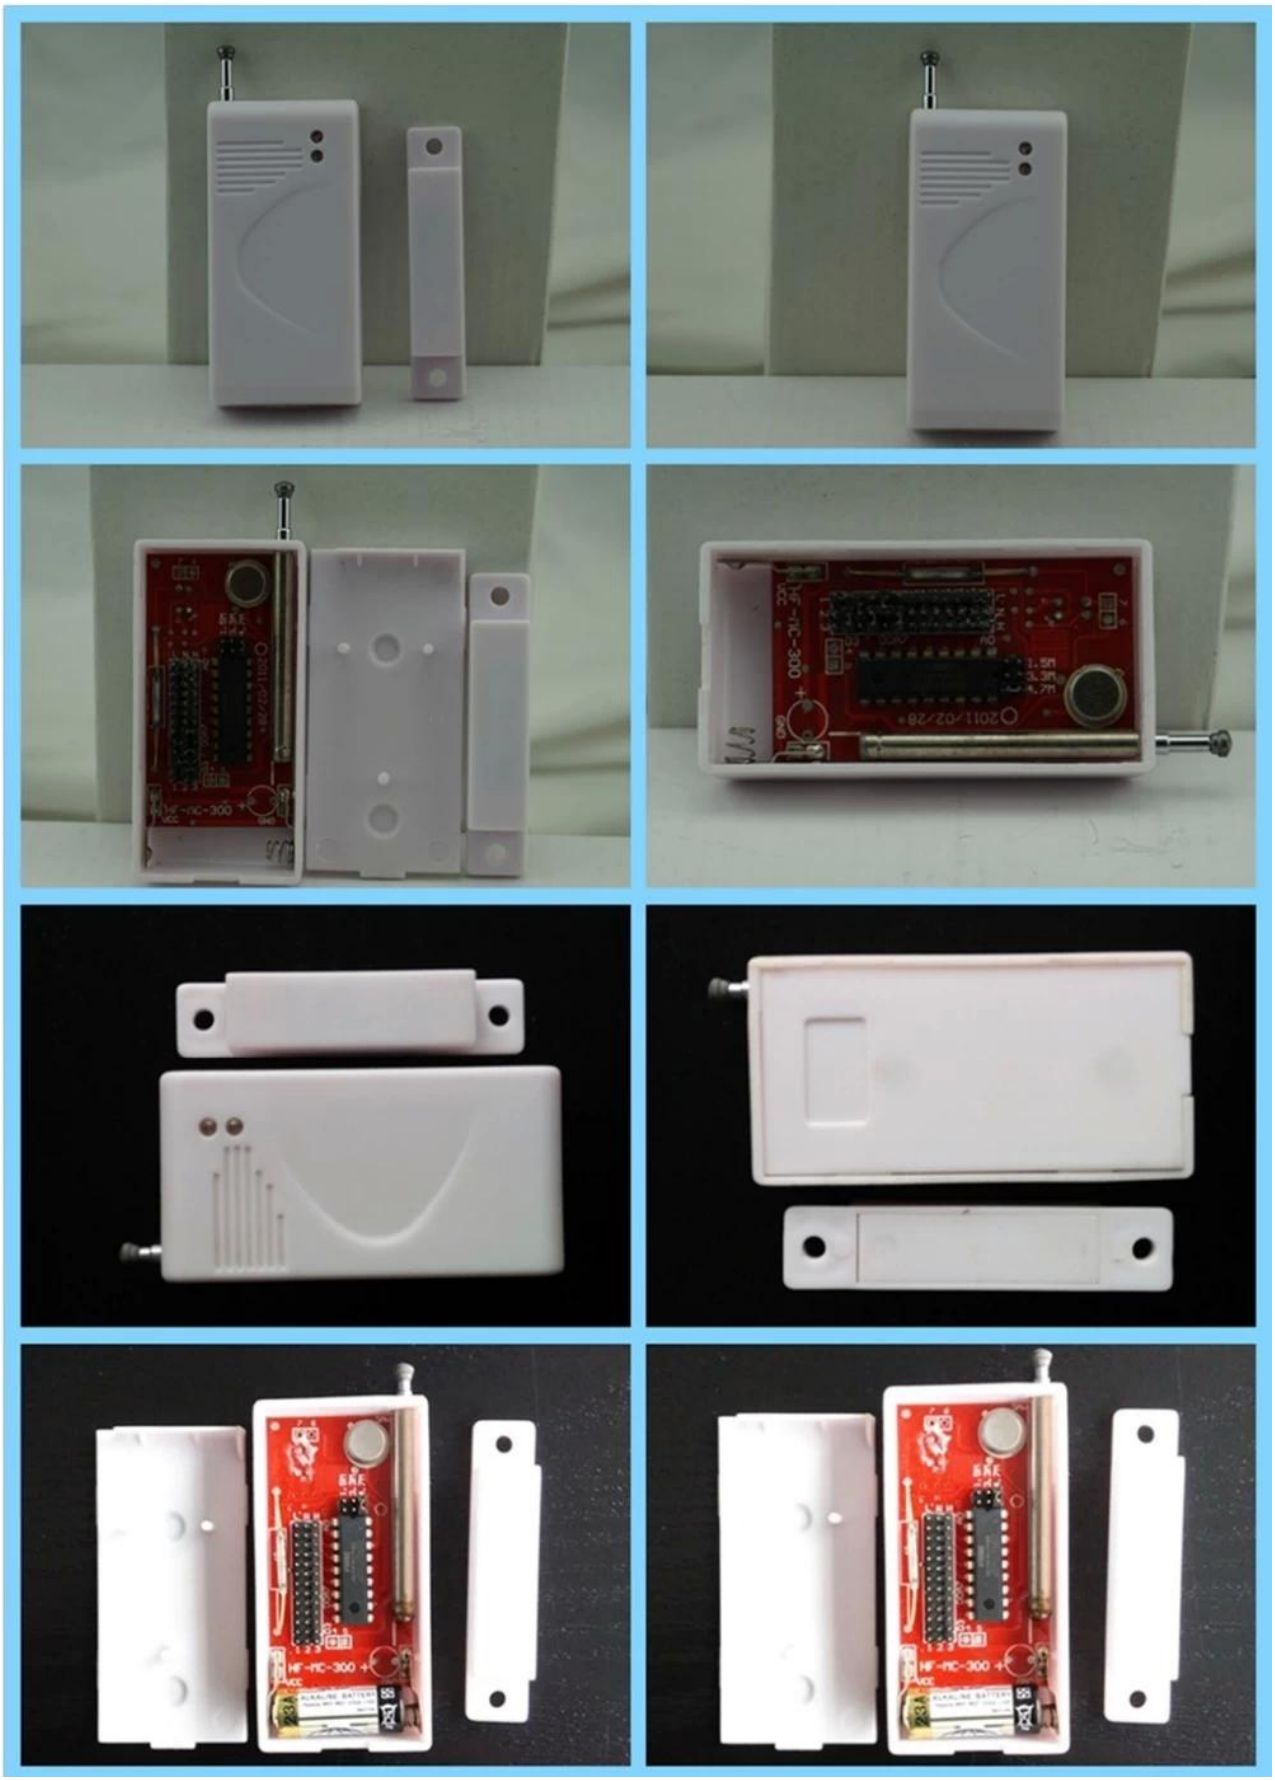

PRODUCT FEATURE

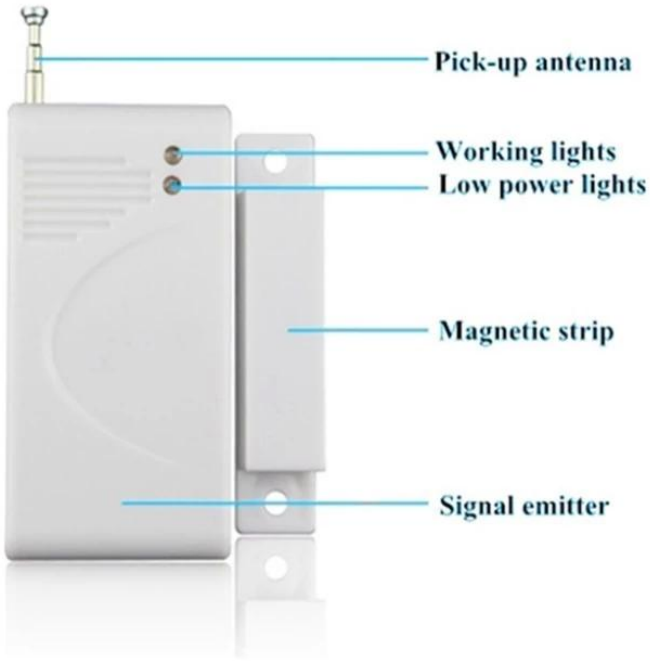

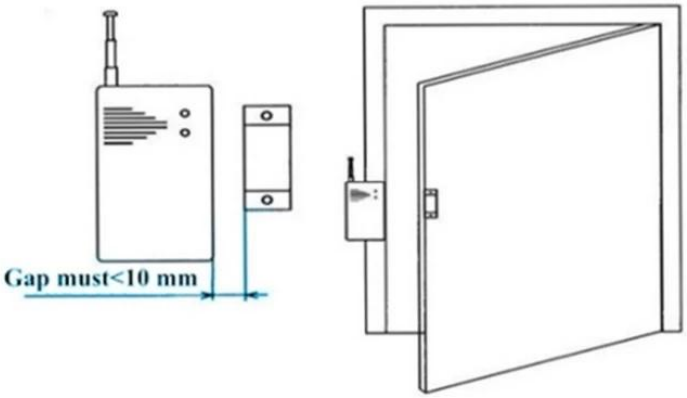

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer.(PS:Detectors and magnetic stripe is opposite, the spacing of less tha 1 cm)

Installation Instruction

1、 Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2、 Suitable for wood door/window or glass door/window.

• *Office show*

SMQT

• *Exhibition*

SMQT