



Nombre del producto:	Detector de humo de fuego 9-35v 4 cableado para panel de fuego y sistema de alarma
Número de modelo:	EB-117B
Fuente de alimentación:	DC 9 ~ 35V
Puerto de alambre:	4 puertos (potencia de entrada +, potencia de entrada, salida de relé (COM), salida de relé (NO o NC))
Tamaño:	100 diámetro * 60 (mm)
Área de detección:	20 metros cuadrados
Indicación de alarma	Luz LED roja encendida
Adecuado para:	Sistema de panel de alarma de incendio
Forma de instalación:	Techo montado
Temperatura de trabajo:	-10 Grados Celsius ~ + 50 Grados Celsius
Humedad de trabajo:	0 ~ 90% RH (sin condensación)
Peso:	0.18kg
LED:	2 luces LED
Material:	Carcasa de ABS + placa de PCB
Color de la vivienda:	Blanco
OEM:	Bienvenido OEM


¿Qué características de nuestro detector de humo?

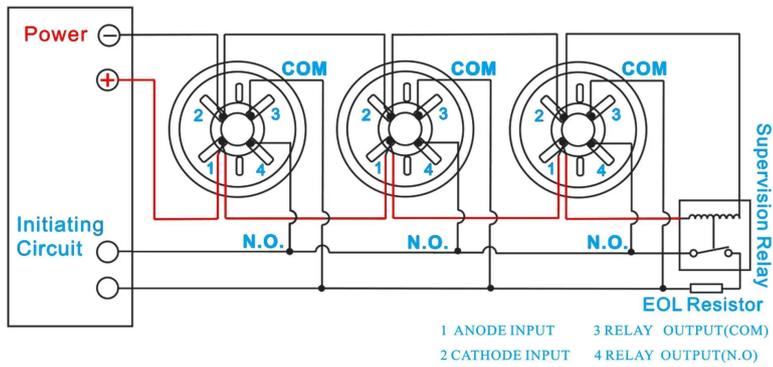

4 wire detectors wiring diagram

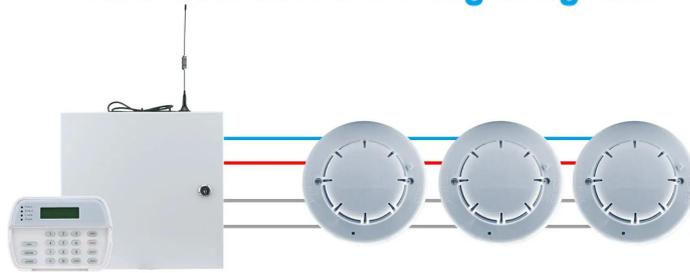

PCB board display

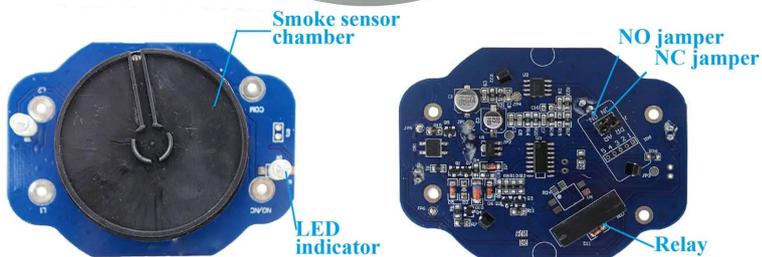

Where to installation?



Mall




Library



Bank

TIPOLOGÍA EN ESPECIE

SOLICITUD

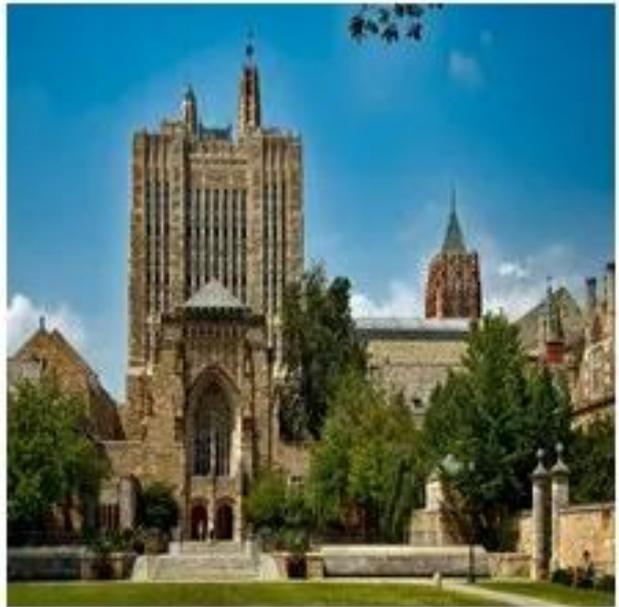

MOSTRAR CASO

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技




SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



DESPACHO DE OFICINA



CLIENTE



EXPOSICIÓN



CERTIFICADO



CÓMO COOPERACIÓN



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer