

## Detector de humo de cigarrillos



Parámetro	
Nombre:	Detector de humo de cigarrillos
Tamaño:	Ø106mm * 59mm
Tensión de trabajo:	Batería 9V 6F22
Corriente de espera:	≤15uA
Corriente de alarma:	≤56mA
Vida útil de la batería:	Menos de 1 año
Indicador de encendido:	RLED ed
Indicador de alarma:	Red LED flash parpadear
Presión de sonido:	85dB / m
Temperatura de trabajo:	-10 ° C ~ 50 ° C
Humedad de trabajo:	≤95% RH
Distancia de transmisión:	& lt; 100m (área abierta)
Ejecutar el criterio:	EN14604
Área de detección:	40 metros cuadrados cuando la altura de la instalación entre 6 y 12 metros. 20 metros cuadrados cuando la altura de la instalación dentro de 6 metros.

## ¿Cuáles son las características de nuestro detector de humo de cigarrillo?



9V 6F22 battery, wireless output 315MHz or 433MHz

Sound & flash alarm wireless fire alarm smoke detector

Dust-proof, moth-proof and anti-interference function

Suitable for detecting the smoke in house, shop, hotel...


2 years warranty, welcome to do OEM and ODM

**TIPOLOGÍA EN ESPECIE**



**SOLICITUD**

# Standalone Gas detector

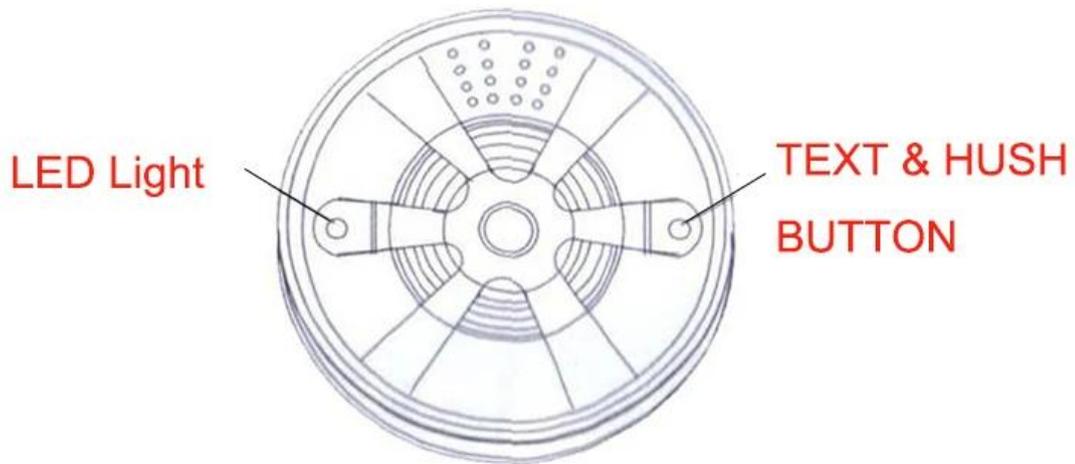

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

## ¿CÓMO SOBRE OTRA OPCIÓN?

