

# Converter RS232/485 to TCP/IP

Interface :Ethernet(10BASE-T),RS232/485 with 6 wiring terminals

Format:TCP/UDP/IP/ICMP,Ethernet,ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment,changing the traditional serial port communication to network communication, to achieve fast serial device networking .

**SMQT®**



## • Parameter

**SMQT®**

| Parámetro                      |                                                              |
|--------------------------------|--------------------------------------------------------------|
| Nombre del producto            | Convertidor de transmisión de datos RS232 / 485 a TCP / IP   |
| Modelo                         | EA-06                                                        |
| Dimensión                      | 92L * 63W * 23H (mm)                                         |
| Fuente de alimentación externa | DC4.5V ~ 5.5V                                                |
| Protocolo serie                | TCP / UDP / IP / ICMP, Ethernet, ARP                         |
| Comunicación Interfaz          | Ethernet (10Base-T), RS232 / 485 Con interruptor de terminal |
| Indicación de señal            | Tres luces de señal TXD RXD PODER                            |
| Transmisión medio              | Cable blindado de par trenzado                               |
| Velocidad de transmision       | 300bps ~ 115200bps                                           |
| Aislamiento                    | 3500VRMS                                                     |
| Color                          | gris                                                         |
| Uso                            | Transmisión de datos                                         |
| Humedad relativa               | 5% ~ 95%                                                     |
| Ambiente Temperature           | 0 °C ~ 50 °C                                                 |
| Peso neto                      | 0.624kg                                                      |

## • In-kind shooting

**SMQT®**



## • Feature

SMQT®



Converter RS232/485 to TCP/IP

Dimension: 96×63×23(mm)


Transmission speed: 300bps-115200bps

Format: TCP/UDP/IP/ICMP/Ethernet/ARP

Interface: Ethernet(10Base-T), RS232/485

with 6 wiring terminals

Welcome OEM and 2 years quality warranty

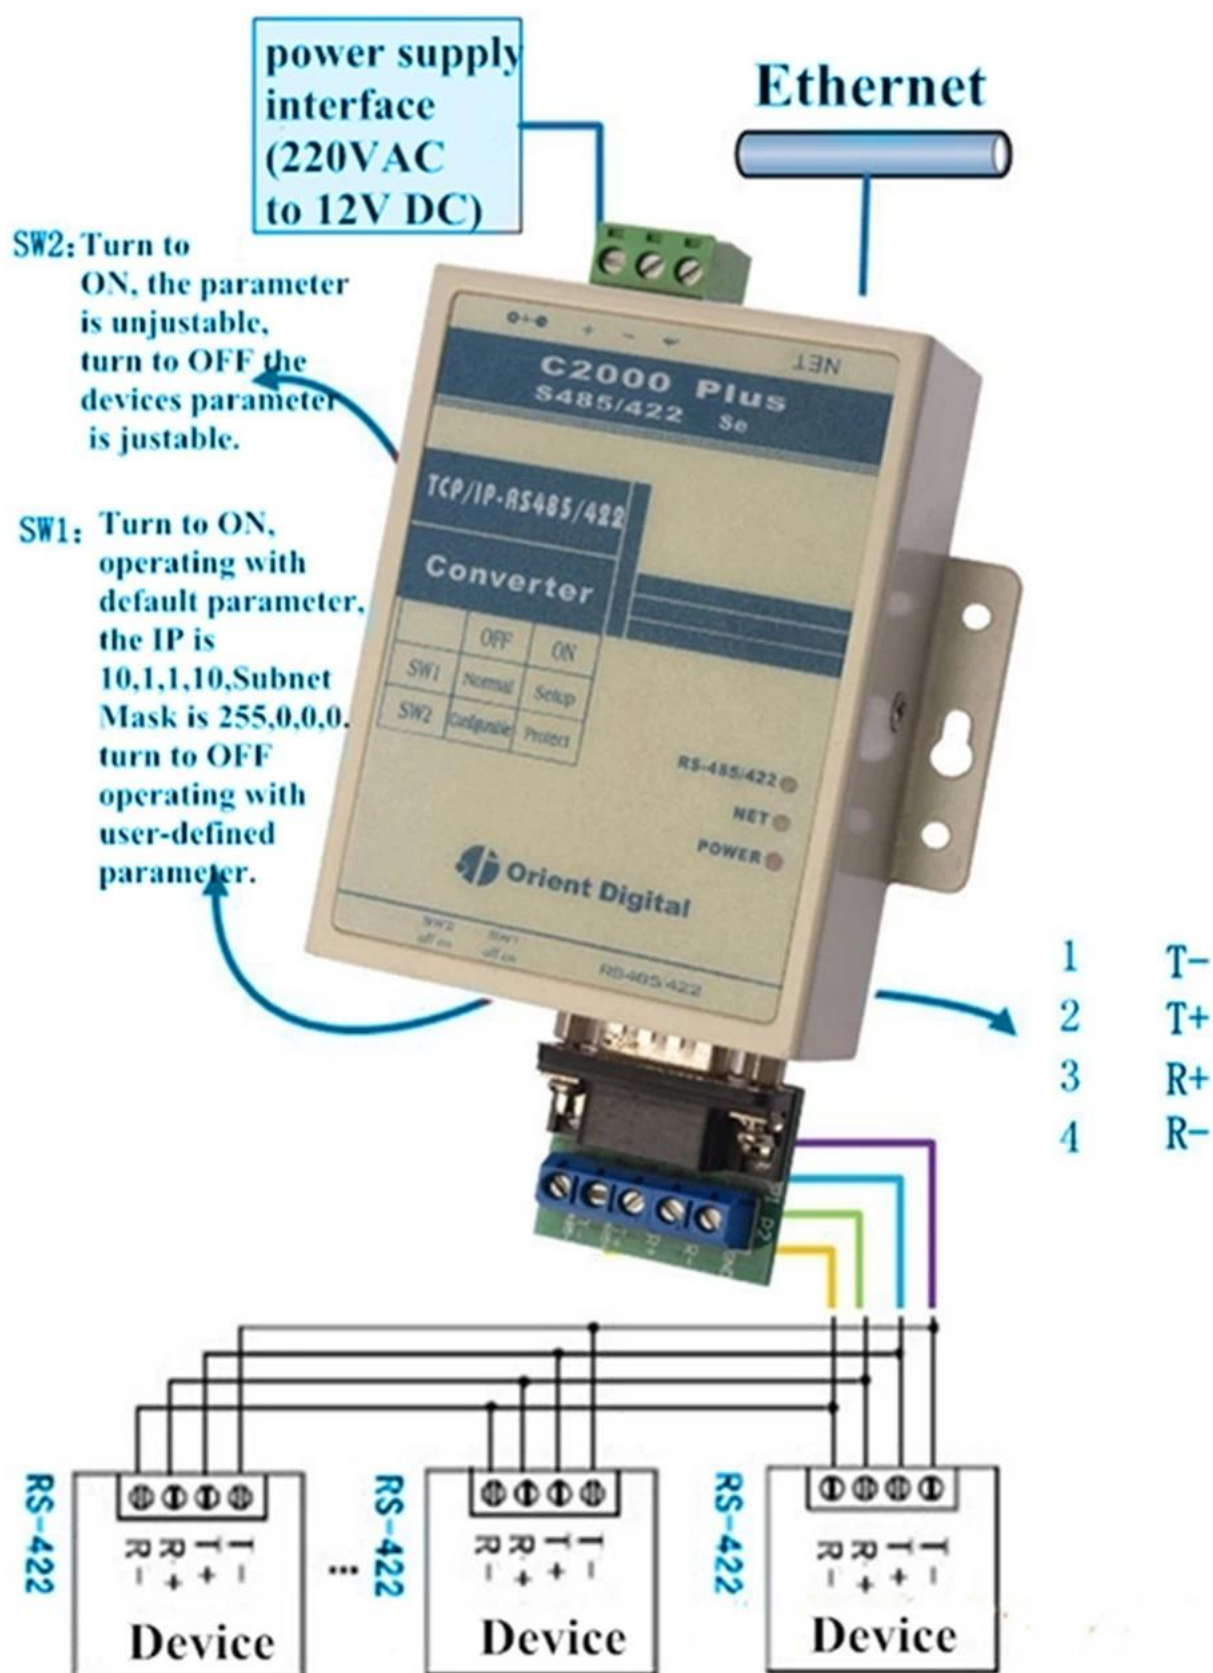

| Lista de envases    |                                                                  |
|---------------------|------------------------------------------------------------------|
| Nombre del producto | Convertidor de transmisión de datos RS232 / 485 a TCP / IP EA-06 |
| Cantidad            | 20 piezas por caja                                               |
| Tamaño del cartón   | 43 * 30 * 37 (cm)                                                |
| Peso                | 15kg                                                             |



## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....