


Especificación	
Nombre del producto	Sensor de puerta magnético inalámbrico
Modelo del Producto	EB-130A
Fuente de alimentación	23A, batería de 12V
Corriente de reposo	≤10UA
Corriente de alarma	≤25MA
ambiente de trabajo	Temperatura de 10 °C ~ 50 °C Humedad relativa ≤97%
Distancia de transmisión	Área abierta 100 m
Dimensiones	65 * 38 * 20 (mm)
Ubicación de la instalación	Puertas, ventanas
Material de la cáscara	abdominales

- 1, diseño de circuito de un solo chip, procesamiento inteligente, estable y confiable.
- 2, con función de detección de bajo voltaje.
- 3, el transmisor inalámbrico de radiofrecuencia que admite el uso del panel de control.
- 4, diseño compacto, buen aspecto, fácil instalación.
- 5, supervisar y controlar todo tipo de puertas y ventanas y apagado.



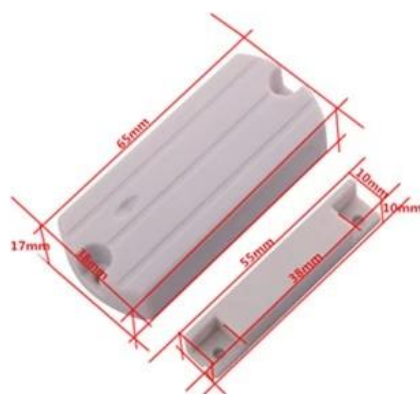

● Installations

SMQT



▲ *Installation*

Selected installation area on door or window, then fix it with screws.

Note: The gap must < 45mm.

The working environment should be dry and clean.

● Packing list

SMQT

Lista de embalaje	
Nombre del producto	Sensor de puerta magnético inalámbrico
Cantidad	200 piezas / caja
Tamaño del cartón	40 * 30 * 20 (cm)
Peso	10 kg



● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

