

• *Parameter*

SMQT

Número de producto	EA-22A	EA-22B
Estructura Estándar	Paneles de aluminio, botones metálicos	Paneles de aluminio, botones metálicos
Rendimiento eléctrico	Durabilidad máxima actual 3A36VDC	Durabilidad máxima actual 3A36VDC
Test de durabilidad	500.000 veces envejecido	500.000 veces envejecido
para el tipo	Marcos huecos aplicables y caja eléctrica sumergida	Marcos huecos aplicables y caja eléctrica sumergida
Temperatura	-10 ~ + 55 °C	-10 ~ + 55 °C
Humedad aplicable	0 a 95% (humedad relativa)	0 a 95% (humedad relativa)
Procesamiento de paneles	Paneles de aluminio con chorro de arena	Paneles de aluminio con chorro de arena

• *Introduction*

SMQT



Botón de liberación de la cerradura de la puerta con el metal

material y botón de la salida del empuje del acero inoxidable para el sistema de control de acceso.

• *Feature*

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• *Installation*

SMQT



Switch power supply

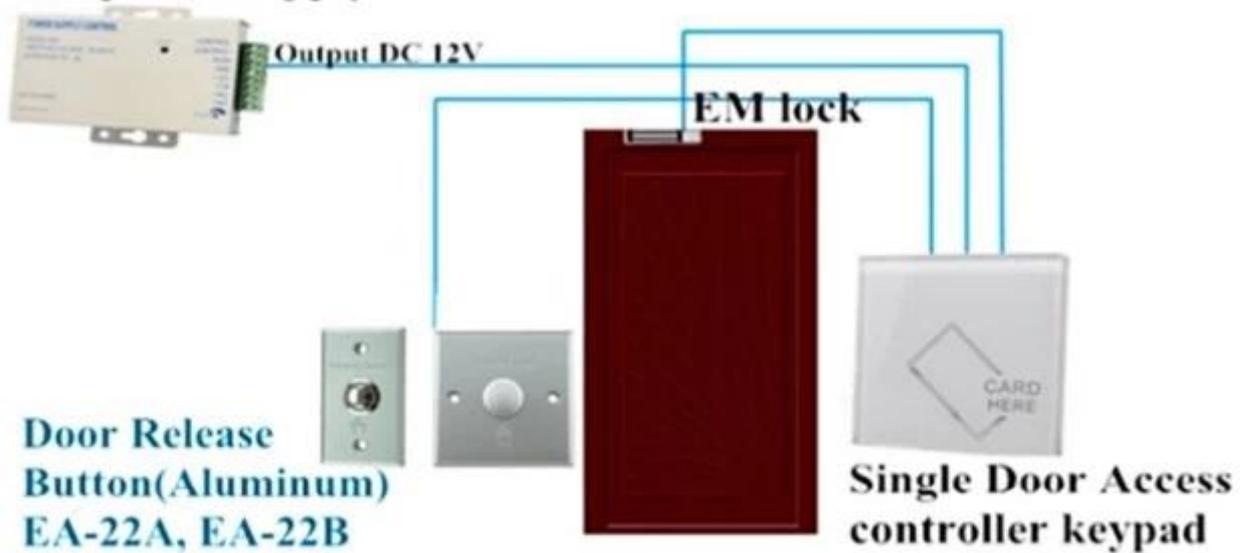

• *Dimension*



• Packaging & shipping

SMQT®





● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....