




| Especificación                   |                                          |
|----------------------------------|------------------------------------------|
| Modelo                           | EA-53C                                   |
| Dimensión                        | 226 × 44,5× 76 (mm)                      |
| Orificio de instalación          | 19× 230 (mm)                             |
| Gama de peso de la puerta        | 85 ~ 100kg                               |
| Ancho de puerta                  | ≤1150mm                                  |
| Función Ack-check                | NO                                       |
| Mas ángulo abierto               | 180 °                                    |
| Ajuste de la velocidad de cierre | Velocidad1: 180°-15°; Velocidad2: 15°-0° |
| Temperatura aplicable            | -20 °C -45 °C                            |
| Aplicabilidad                    | Puerta abierta o abierta a la izquierda  |
| Prueba de durabilidad pasada     | 1000000ciclos                            |
| Uso                              | Sysetm de control de acceso              |
| Peso                             | 2.5kg                                    |

**¿Qué características de nuestro EA-53C?**

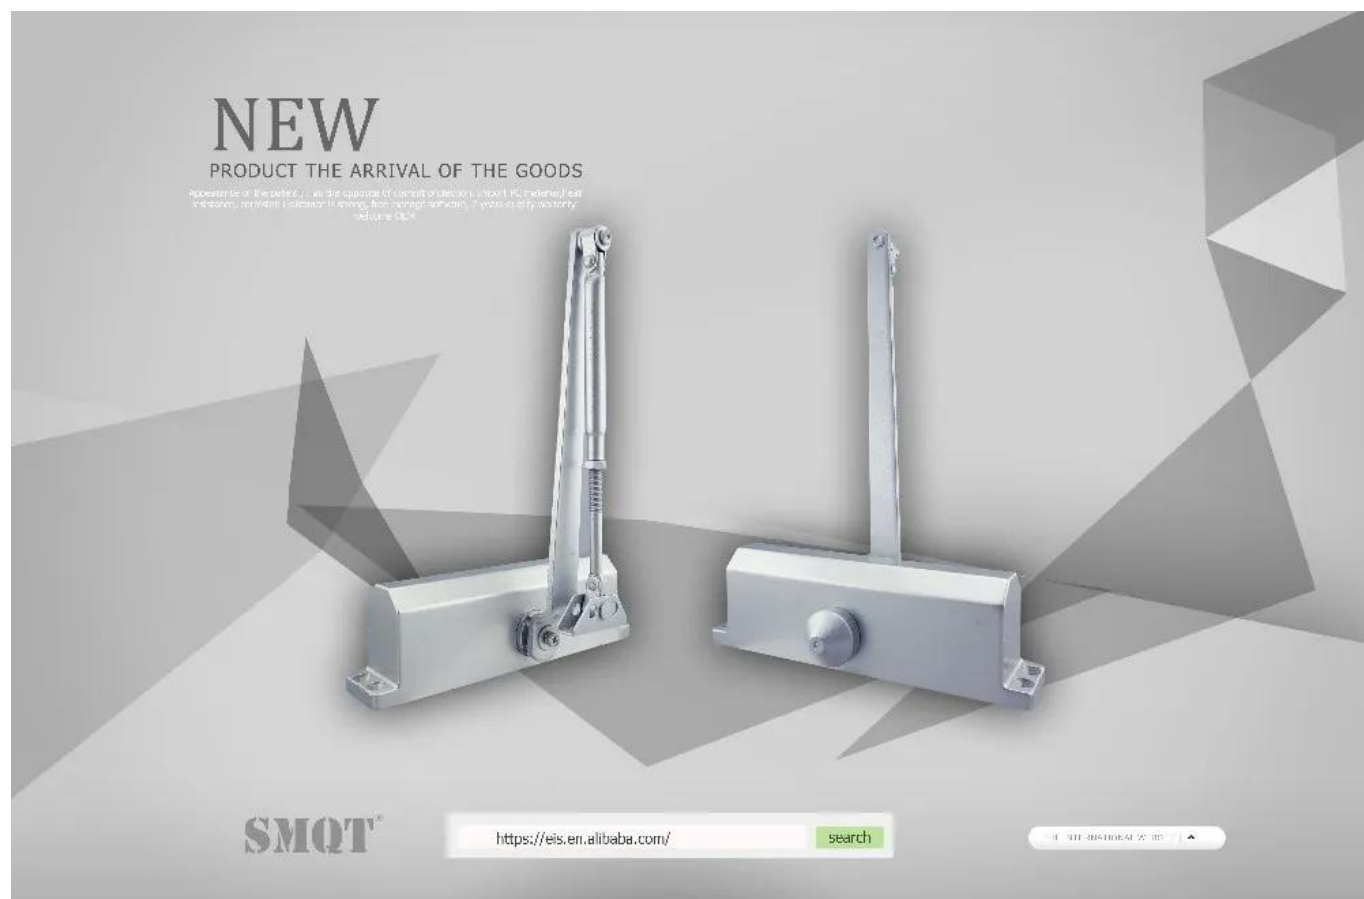

**1.Back Check and Delay Action available.**


**2.High quality alloy door closer body, silver coating finished.**

**3.With standard foldable arm. Parallel arm channel,hold-open arm are optional**

**4.1,000,000 times tested without damage.5 years warranty**

**5.can be used on the wooden door, steel door, fire door and places where security is strictly required**



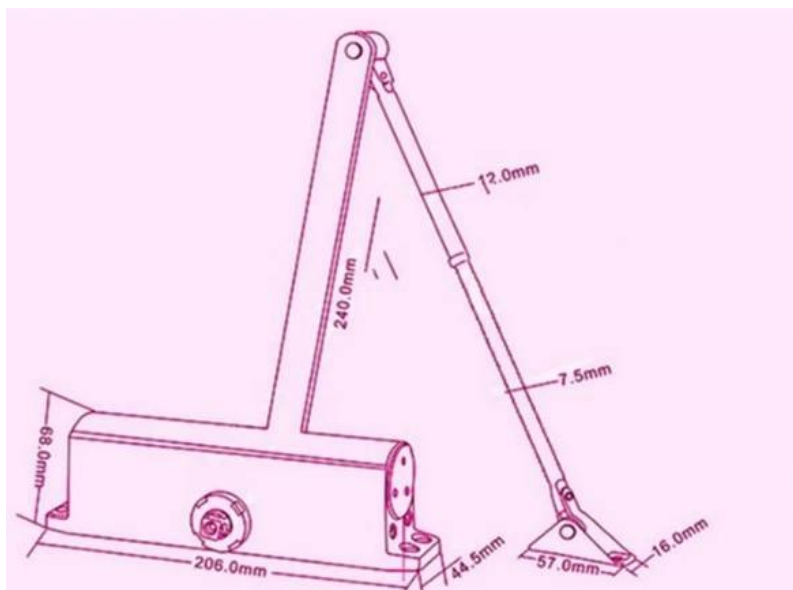

## PROCESO DE INSTALACIÓN



## • Office Show

SMQT



## • Customer

SMQT



## • Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



\*\*\*\*\*

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



## • Certificates

SMQT

