

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optoinal

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT

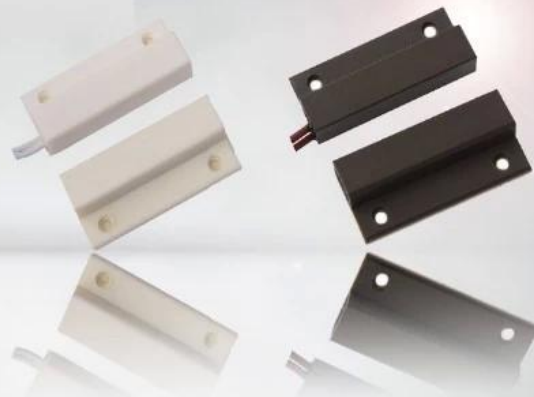

• Parameter

SMQT

Dimensiones	41L * 27W * 8 (mm)
Conexión	Normalmente abierto / normalmente cerrado
Distancia de funcionamiento	20 ± 5 (mm)
Presión máxima	≤ 100VDC
Corriente de carga	≤500mA
potencia de trabajo	≤ 10W
Material de la carcasa	ABS material ignífugo
Forma de color	Cafe Blanco
Alcance	Puerta o ventana no ferrosa
Peso del Producto	12g

• Introduction

SMQT

El detector magnético del interruptor de contacto de la puerta es el sensor de movimiento de la puerta para el dispositivo de alarma del sensor de proximidad abierto de la puerta.

PRODUCT PICTURE



PRODUCT FEATURE



EB-132

Dimension:34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage≤100VDC,MAX current≤500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty,welcoem OEM



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair