• Parameter

SMQT

Parámetro	
Nombre del producto	Sensor de contacto magnético oculto
Modelo	EB-135
Dimensión	Φ10 × 18,5 (mm)
Modo de código	NO / NC (opcional)
Brecha	20 \ pm 5 (mm)
Tensión máxima	≤ 100V DC
corriente maxima	≤500mA
Max rating	≤ 10W
Color	Marrón / Blanco (opcional)
Estar hecho para	Puerta o ventana de madera
Material	Carcasa anti-incendio ABS
Temperatura de trabajo	-10 ℃ ~ 50 ℃
Peso neto	8g

• Introduction

SMQT

El sistema de seguridad del dispositivo de alarma de sensor de proximidad de puerta es el interruptor de contacto de sensor de puerta abierta para el sistema de control de puerta.

PRODUCT PICTURE

PRODUCT FEATURE

Door Magnetic Contact

safe door happy life

(Notice:need match the home alarm system to

Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.



Notice:
Gap<2cm

Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

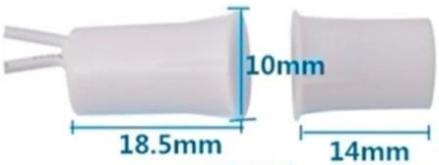

White

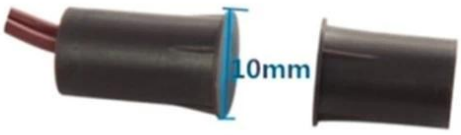

Brown

• *Packaging & shipping*

SMQT

• *Office show*

SMQT

•*Exhibition*

SMQT